arXiv:0909.5424v2 [cs.IT] 19 Oct 2009

The Degrees of Freedom Regions of MIMO Broadcast, Interference, and Cognitive Radio Channels with No CSIT

Chinmay S. Vaze and Mahesh K. Varanasi

Abstract

The degrees of freedom (dof) regions are characterized for the multiple-input multiple-output (MIMO) broadcast channel (BC), the interference channel (IC), and the cognitive radio channel (CRC) when there is perfect and no channel state information at the receivers and the transmitter(s) (CSIR and CSIT), respectively. For the K-user MIMO BC, the exact characterization of the dof region is obtained, which shows that simple time-division-based transmission is dof-region optimal. Using the techniques developed during the analysis of the dof region of the BC, the corresponding problems for the two-user MIMO IC and the two-user MIMO CRC are addressed. For both of these channels, the exact characterization of the dof region is provided, except in a few antenna configurations. In these cases, an outer-bound on the dof region is obtained. All these results are derived for a class of distributions of the fading channel matrices and the additive noises that is more general (in some sense) than those considered in the earlier works. Furthermore, using the dof region of the K-user MIMO BC, the dof regions of the K-user MIMO IC and the K-user MIMO CRC are derived in some special cases.

Index Terms

Broadcast channel, cognitive radio channel, degrees of freedom region, interference channel, multiple-input multiple-output systems.

This work was supported in part by NSF Grant 0728955. The authors are with the Department of Electrical, Computer and Energy Engineering, University of Colorado, Boulder, CO 80309-0425 USA (e-mail: Chinmay.Vaze, varanasi@colorado.edu).

I. Introduction

MULTIPLE-INPUT multiple-output (MIMO) systems are of great interest because they can provide a significantly higher capacity as compared to their single-input single-output (SISO) counterparts by exploiting the spatial dimension. One way of measuring this benefit is via the spatial multiplexing gain or the degrees of freedom (dof), defined as the limit of the ratio of the capacity to the logarithm of the signal-to-noise ratio, i.e., the capacity pre-log factor. For example, the point-to-point MIMO channel with M transmit and N receive antennas has $\min(M, N)$ dof if there is perfect channel state information at the transmitter and at the receiver (CSIT and CSIR, respectively) whereas the SISO counterpart has only 1 dof [1]. Interestingly, even with perfect CSIR but no (or imperfect) CSIT, there is no loss of dof so that the dof are still equal to $\min(M, N)$ [1]. However, this may or may not be the case with multi-user channels. For instance, whereas the dof region of the Gaussian MIMO multiple-access channel are unaffected by no (or partial) CSIT [1], those of the Gaussian MIMO broadcast channel (BC) are [2], [3], [4], [5]. With this motivation, we aim to study the impact of no CSIT on the dof region of some multi-user MIMO channels, namely, the BC, the interference channel (IC) [6], [7], [8], and the cognitive radio channel (CRC) [9], [10], [11].

The fact that over the Gaussian MIMO BC with imperfect CSIT, there can be a loss in the dof was reported for the first time in [2]. Later, in [3], for the complex-valued BC with M transmit antennas and K single-antenna users, denoted as the $M \times 1 \cdots K$ BC as in [2], with isotropic fading, where channel norms and additive noises may have arbitrary distributions [1], and no CSIT, the authors developed the so-called scalar upper-bound, which implies that over this BC, the maximum achievable sum-dof are one. Note that under perfect CSIT, the sum-dof are $\min(M, K)$. Next, in [4], the authors studied the real-valued Gaussian $2 \times 1 \cdots 2$ BC with any arbitrary partial CSIT [2]. They showed that the sum-dof are upper-bounded by $\frac{2}{3}$. This result, though specialized for the $2 \times 1 \cdots 2$ real-valued BC, is strong; it says that no matter how good the quality of partial CSIT might be, as long as it is not perfect, the sum-dof will not be equal to one, the maximum achievable with perfect CSIT. Furthermore, in [5], the authors studied the two-user no-CSIT MIMO BC for the case of independent and identically distributed (i.i.d.) Rayleigh fading and additive white Gaussian noise. It was shown that the dof region is the one that is achievable by simple time-division between the two users [3].

---

[1] Hence, this BC is not degraded, less noisy, or more capable and its capacity region is not known in general.

In this paper, we first obtain the exact characterization of the dof region of the two-user MIMO BC with no CSIT. Although such a result already exists in the literature, our result is more general, in one sense or another, than previously obtained results. We then generalize this two-user result to the case of multiple-user MIMO BC. Related works include the paper [3] which considers the case of isotropic fading and single-antenna users. Here, we consider multiple-antenna users and a distribution of fading channel matrices that is also more general. In [4], the authors consider a more general type of fading and the case of partial CSIT, unlike the no CSIT case considered here. However, their result is specific to the case of the real-valued $2 \times 1 \cdots 2$ Gaussian BC; and it is not clear if that results can be extended to the complex-valued BC and/or to multiple-receive-antenna users. In this work, we consider the complex-valued BC with noise that is not necessarily Gaussian and with receivers having multiple antennas. Lastly, the two-user BC considered in [5] is degraded (and hence the capacity region is known) and has specific assumptions mentioned earlier about the distribution of the channel matrices and the additive noise. The BC dealt with here is more general; and morever, we also obtain the dof region of the general multiple user BC, unlike [5].

---

[2] Here, partial CSIT means that the differential entropy of the channel given the transmitter's knowledge of the channel is greater than $-\infty$. It is assumed here that quality of partial CSIT remains constant and does not increase with the transmit signal power. If the quality of partial CSIT is allowed to scale with the transmit signal power, then the sum-dof equal to $\min(M, K)$ can be achieved over the Gaussian $M \times 1 \cdots K$ BC [12].

[3] This region as an inner-bound also appeared in [13]. However, the converse was not proved therein.

Using the techniques developed during the analysis of the dof region of the BC, we address the problem of obtaining the dof-region of the two-user MIMO IC and the two-user CRC with no CSIT. For the MIMO IC, we first derive the inner-bound on the dof region which is based on the following idea. Since there is no CSIT, the transmitters can not employ intelligent techniques, such as zero-forcing beamforming, in order that the interference at the receivers is reduced. The receivers treat the interference as noise and use zero-forcing beamforming to eliminate the interference. As a result, the dof that a given receiver can achieve are equal to the dimension of the received signal-space, which equals the number of receive antennas, minus the dimension of the subspace spanned by the interference, which equals the number of streams sent by the unpaired transmitter. Hence, the inner-bound on the dof region is (strictly) smaller than the dof region of the perfect-CSIT IC [8]; see Proposition 1 for the inner-bound. We later obtain the outer-bound on the dof region which matches with the inner-bound in most cases. In particular, if we consider the IC with two transmitters with M_1 and M_2 antennas, respectively, and two receivers with N_1 and N_2 antennas, respectively, then our outer-bound does not coincide with the inner-bound only in the following cases: $M_2 \geq N_2 > N_1 > M_1$ (see Theorem 5), $N_1 > M_1 > N_2 > M_2$ (see Theorem 7), and the symmetric counterparts of these cases obtained by switching the order of two users. In other words, for the IC with any other antenna configuration than those mentioned above, the dof region is equal to the inner-bound given in Proposition 1.

We have become aware of the very recent work [14], [15] in the final stages of writing this paper. These papers also consider the characterization of the dof region of the two-user MIMO IC with no CSIT. Interestingly, for the ICs satisfying $M_2 \geq N_2 > N_1 > M_1$ or $N_1 > M_1 > N_2 > M_2$ (or the symmetric counterparts of these), [14], [15] provide outer-bounds which coincide with those derived here in Theorem 5 and Theorem 7; and for the rest of the ICs, [14], [15] obtain, as we do, the exact characterization of the dof region [4]. Nonetheless, the distribution of the fading processes and the additive noise taken here are more general than those in [14], [15] in some sense; this is detailed in Section IV. Furthermore, the dof region of a special class of K-user ICs is also obtained. This result implies among other things that for a SISO K-user IC the sum dofs collapse to 1. This result is to be contrasted with the well known achievability result via interference alignment of $K/2$ dof with perfect CSIT [17].

The CRC is basically the IC with degraded message sets [9], [10]. Under perfect CSIT, the dof region has already been characterized [8]. However, to the best of our knowledge, this problem under no or partial CSIT has not yet been addressed. In [16], we derived the achievable sum-dof for the MIMO CRC with no CSIT. Here, we obtain more general results pertaining to the dof region of the CRC. As in the case of the IC, we first derive the inner-bound on the dof region; see Proposition 2. Later, we derive an outer-bound. This outer-bound coincides with the inner-bound of Proposition 2, except when $M_1 \geq N_1 > N_2 > M_2$ (see Theorem 10) and $N_1 > M_1, \min(N_1, M_1 + M_2) > N_2 > M_2$ (see Theorem 11). That is, except in these two cases, the dof region of the CRC is fully characterized. Moreover, the dof region of a special class of the general K-user CRCs is also obtained.

Notation: For the column vector $V(t)$, we define $\mathbf{V}_1^n$ to be the vector $\begin{bmatrix} V(1) \\ \vdots \\ V(n) \end{bmatrix}$. To simplify the notation, we denote $\mathbf{V}_1^n$ as $\mathbf{V}$. Let $V_i(t)$ denote the i^{th} element of vector $V(t)$.

---

[4] This work was done independently of [14], [15]. We started this work by aiming to extend our results in [16] to obtain the dof region of the MIMO CRC with no CSIT, and in the process, realized the importance of the corresponding problems for the BC and the IC. This paper is the outcome of the ensuing effort.

Then we define $(\mathbf{V}_i)_1^n$ to be the column vector obtained by stacking $V_i(1)$, $\cdots$, $V_i(n)$ on top of each other; we denote it as $\mathbf{V}_i$. For a matrix $M(t)$, we similarly define $\mathbf{M}_1^n = \mathbf{M}$ to be the block-diagonal matrix with entries $M(1)$, $M(2)$, $\cdots$, $M(n)$ along its diagonal. In the case of a scalar variable $x(t)$, if it corresponds to the transmitted or received signal, or noise then for defining $\mathbf{x}$ we treat $x(t)$ as a vector whereas if $x(t)$ corresponds to a fading process then we treat it as a matrix. Next, we define a function, called the 'multiplexing gain', denoted as $\mathrm{MG}(\cdot)$, as $\mathrm{MG}(x) = \lim_{P\to\infty} \frac{x}{\log P}$, where P is transmit-signal power. Lastly, $\mathbb{E}_H(\cdot)$ denotes the expectation over the random variable H.

II. The Two-User MIMO BC

A. Channel Model

Consider the two-user complex-valued MIMO BC with $M > 1$ transmit antennas and two users, 1 and 2, with N_1 and N_2 receive-antennas, respectively. The input-output relationship is given by

$$Y(t) = A(t)X(t) + W(t) \text{ and } Z(t) = H(t)X(t) + W'(t), \tag{1}$$

where at time t, $X(t) \in \mathcal{C}^{M\times 1}$ is the transmitted signal; $Y(t) \in \mathcal{C}^{N_1\times 1}$ and $Z(t) \in \mathcal{C}^{N_2\times 1}$ are two received signals; $W(t)$ and $W'(t)$ are the additive noises at the two receivers; $A(t) \in \mathcal{C}^{N_1\times M}$ and $H(t) \in \mathcal{C}^{N_2\times M}$ are the fading channel matrices corresponding to the two users; and there is a transmit-power constraint of $\lim_{n\to\infty} \frac{1}{n}\sum_{t=1}^{n} \mathbb{E}||X(t)||^2 \leq P$. We assume that both the fading processes are perfectly and instantaneously known at both the receivers whereas the transmitter knows only the distribution of the fading processes but not the actual realizations, i.e., the case of perfect CSIR but no CSIT.

We assume that the entries of $W(t)$ and $W'(t)$ are i.i.d. according to $\mathcal{CN}(0,1)$. Also the realizations of noise are i.i.d. across time.

Let us define the distributions of the fading processes. Let $f \in \mathcal{C}^{1\times M}$ be a complex-valued unit-norm random row vector. Let A_i denote the i^{th} row of $A \in \mathcal{C}^{N_1 \times M}$ and similarly, H_i of $H \in \mathcal{C}^{N_2 \times M}$. Let f_1, f_2, $\cdots$, $f_{N_1+N_2}$ be i.i.d. random vectors according to f. These will correspond to the directions of the channel vectors. Let a_1, $\cdots$, a_{N_1} and h_1, $\cdots$, h_{N_2} be non-negative independent (also independent of $\{f_i\}$s) continuous random variables. These will correspond to the norms of the channels vectors. It is assumed that if we consider the product of any of these non-negative random variables with the unit-norm row random vector f, the differential entropy of the product is greater than $-\infty$. Now suppose A be distributed as $\begin{bmatrix} a_1 f_1 \\ \vdots \\ a_{N_1} f_{N_1} \end{bmatrix}$ and let H be distributed as $\begin{bmatrix} h_1 f_{N_1+1} \\ \vdots \\ h_{N_2} f_{N_1+N_2} \end{bmatrix}$. The realizations $A(t)$ and $H(t)$ are i.i.d. according to A and H. Assume that the distribution of A (and H) is such that if we choose any m rows out of A (or H), the resulting matrix has a rank of $\min(m, M)$ with probability 1. Define a diagonal matrix $a(t)$ to consist of entries $a_1(t)$, $\cdots$, $a_{N_1}(t)$ along the diagonal; define $h(t)$ analogously. Define $h_{\max}(t)$ to be the maximum of $a_1(t)$, $\cdots$, $a_{N_1}(t)$, $h_1(t)$, $\cdots$, $h_{N_2}(t)$.

Note that under the above assumptions on the distributions of the channel matrices, the BC defined here does not fall into any of the special classes of the BC (for example, degraded, less noisy, or more capable, etc.) for which the capacity region is known. Thus, we do not know the capacity region, in general. Note that the above assumptions are more general than those in [3], [5], [14].

Consider a coding scheme that achieves the rate pair (R_1, R_2). Let M_Y and M_Z be independent messages to be sent to users 1 and 2, respectively, over the block-length of n where M_Y (M_Z) is a random variable uniformly distributed over a set $\mathcal{M}_Y$ ($\mathcal{M}_Z$) of cardinality 2^{nR_1} (2^{nR_2}). We say that the pair (R_1, R_2) is achievable if the probability of error at both the receivers goes to zero as the block-length n tends to infinity. Note here that since there is no CSIT, the transmitted codeword $\mathbf{X}$ is independent of the fading processes and obviously of the additive noise. We now define the capacity region for the above BC as the set of all rate pairs (R_1, R_2) that are achievable. We then define the dof region[5] as

$$\mathbf{D} = \left\{ (d_1, d_2) \,\middle|\, d_1, d_2 \geq 0 \text{ and } \exists\, (R_1(P), R_2(P)) \in C(P) \text{ such that } d_i = \lim_{P \to \infty} \frac{R_i(P)}{\log P}, i = 1, 2 \right\}. \tag{2}$$

B. The DoF Region for the BC

Theorem 1: The dof region for the MIMO BC defined in the previous section is given by

$$\mathbf{D} = \left\{ (d_1, d_2) \,\middle|\, d_1, d_2 \geq 0, \frac{d_1}{\min(M, N_1)} + \frac{d_2}{\min(M, N_2)} \leq 1 \right\}. \tag{3}$$

The above region is clearly achievable by a simple time-division-based scheme. The idea is that because of the complete lack of CSIT, the system is interference-limited and therefore, the time-division-based scheme is dof-region optimal. Thus to establish the theorem, we need only to prove that the above region is an outer-bound as well. Also, without loss of generality, we assume that $N_1 \geq N_2$.

Remark 1: Note that if we consider the BC in which the receiver knows only its own fading process (perfect but only respective CSIR), then the dof-region of such a BC is outer-bounded by the one in which both the receivers know both the fading processes. Note that even with (perfect but) respective CSIR, the region described in Theorem 1 is achievable. Therefore, proving that the above region is an outer-bound for the BC defined in the previous subsection is sufficient to establish the case of the respective CSIR also.

Remark 2: The dof region of the MIMO BC with perfect CSIT is given by [18]

$$\{(d_1, d_2) | d_1, d_2 \geq 0, d_1 \leq \min(M, N_1), d_2 \leq \min(M, N_2), \text{ and } d_1 + d_2 \leq \min(M, N_1 + N_2)\}.$$

---

[5] Throughout this paper, the dof region is denoted by symbol $\mathbf{D}$, regardless of the channel we are dealing with. The meaning is to be understood by the context.

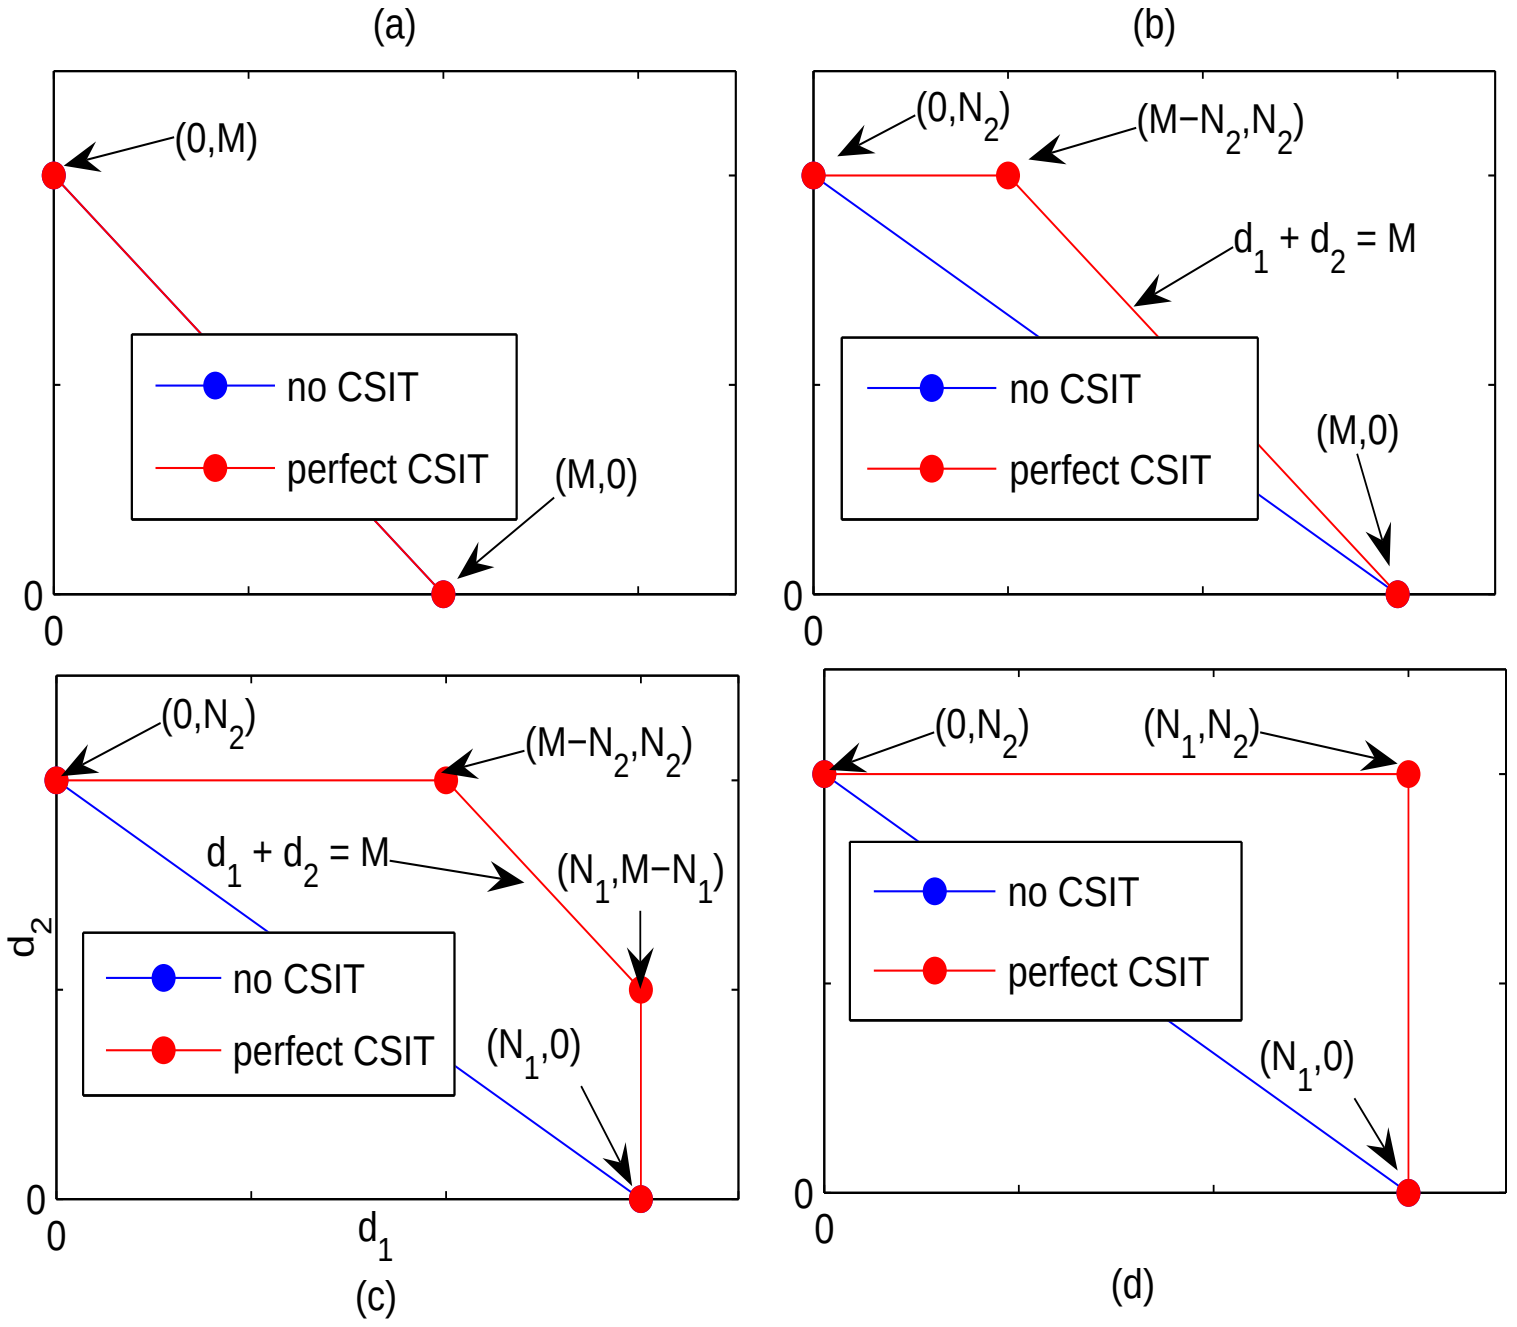

Fig. 1

THE DOF REGION OF THE BC WITH PERFECT AND NO CSIT: (A) $M \leq N_1 \leq N_2$, (B) $N_2 < M \leq N_1$, (C) $N_2 \leq N_1 < M < N_1 + N_2$, (D) $N_2 \leq N_1 < N_1 + N_2 \leq M$.

In Fig. 1, we present four cases for comparison. In Fig. 1(a), $M \leq N_1 \leq N_2$, and therefore, the perfect and no CSIT dof regions are equal. In Fig. 1(b), we have the case of $N_2 < M \leq N_1$. When compared with the previous case, here we have more transmit antennas (relative to N_1 and N_2). The dof regions under no and perfect CSIT are bigger as compared with the previous case. In Fig. 1(c), we have $N_2 \leq N_1 < M < N_1 + N_2$ while in Fig. 1(d), $N_2 \leq N_1 < N_1 + N_2 \leq M$. In both the cases, the no CSIT dof region is the same (assuming that N_1 and N_2 remain the same and M increases while going from Case (c) to Case (d)), though this region is larger than the corresponding one in Case (b). Also note that the perfect CSIT dof region has expanded while going from Case (c) to Case (d).

C. Proof

Consider any coding scheme that achieves the point (d_1, d_2). Using Fano's inequality [19] and assuming that user 1 knows the message M_Z, we can bound the achievable rates of the two users as

$$R_2 \le \frac{1}{n} I(M_Z; \mathbf{Z}|\mathbf{A}, \mathbf{H}) + \epsilon_n \text{ and } R_1 \le \frac{1}{n} I(M_Y; \mathbf{Y}|M_Z, \mathbf{A}, \mathbf{H}) + \epsilon_n, \tag{4}$$

where $\epsilon_n \to 0$ as $n \to \infty$.

Let us define the quantities $\tilde{Y}(t) = h_{\max}(t) a(t)^{-1} A(t) X(t) + W(t)$ and $\tilde{Z}(t) = h_{\max}(t) h(t)^{-1} H(t) X(t) + W'(t)$. Then following our notation define $\tilde{\mathbf{Y}}$ and $\tilde{\mathbf{Z}}$. We now claim that conditioned on $A(t)$ and $H(t)$, the following Markov chains hold: $X(t) \to \tilde{Y}(t) \to Y(t)$ and $X(t) \to \tilde{Z}(t) \to Z(t)$; also instead of $X(t)$ here we can have M_Y and/or M_Z. This follows easily by noting that every entry of diagonal matrices $a(t)$ and $h(t)$ is less than or equal to $h_{\max}(t)$ and that the noise is Gaussian. Then using data processing inequality [19], the following can be proved:

$$I(M_Z; \mathbf{Z}|\mathbf{A}, \mathbf{H}) \le I(M_Z; \tilde{\mathbf{Z}}|\mathbf{A}, \mathbf{H}) \text{ and } I(M_Y; \mathbf{Y}|M_Z, \mathbf{A}, \mathbf{H}) \le I(M_Y; \tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})$$

Note, the fact that M_Z is present under conditioning in the second inequality does not really matter.

Therefore we get

$$R_2 \le \lim_n \frac{1}{n} I(M_Z; \tilde{\mathbf{Z}}|\mathbf{A}, \mathbf{H}) = \lim_n \left\{ \frac{1}{n} h(\tilde{\mathbf{Z}}|\mathbf{A}, \mathbf{H}) - \frac{1}{n} h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H}) \right\}, \tag{5}$$

$$R_1 \le \lim_n \frac{1}{n} I(M_Y; \tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H}) = \lim_n \left\{ \frac{1}{n} h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H}) - \frac{1}{n} h(\tilde{\mathbf{Y}}|M_Y, M_Z, \mathbf{A}, \mathbf{H}) \right\}. \tag{6}$$

If we apply the function 'multiplexing gain' to the above equations, we will get bounds on d_1 and d_2. Since the dof for the point-to-point channel with M transmit and N receive antennas are $\min(M, N)$, it is clear that $\text{MG}\left\{ \lim_n \frac{1}{n} h(\tilde{\mathbf{Z}}|\mathbf{A}, \mathbf{H}) \right\} \le \min(M, N_2)$. Further, since the codeword $\mathbf{X}$ is determined by messages M_Y and M_Z, $\mathrm{MG}\left\{\lim_n \frac{1}{n}h(\tilde{\mathbf{Y}}|M_Y, M_Z, \mathbf{A}, \mathbf{H})\right\} = 0$. We will prove later that

$$\min(M, N_1)\cdot\mathrm{MG}\left\{\lim_n \frac{1}{n}h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H})\right\} \geq \min(M, N_2)\cdot\mathrm{MG}\left\{\lim_n \frac{1}{n}h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})\right\}. \quad (7)$$

Thus, combining these results, we can obtain our theorem. In short, what remains to prove is the above inequality.

Our approach outlined above is motivated by the one of [4]. In [4], for the real-valued $2 \times 1 \cdots 2$ Gaussian BC with partial CSIT, the authors prove that $h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H})$ is lower-bounded by some fraction (< 1) times $h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})$; to be precise, the fraction is $\frac{1}{2}$ [6]. However, to get the tighter result here, we need this fraction to be unity (note for the $2 \times 1 \times 2$ BC, in (7) we have $\min(M, N_1) = \min(M, N_2) = 1$). We now prove below that for the BC defined earlier we can get the required fraction, i.e., we prove inequality (7) and get the tightest result.

With this discussion, we now proceed to establish inequality (7), the important step in the proof. We consider three cases: $M \geq N_1 \geq N_2$, $N_1 > M > N_2$, and $N_1 \geq N_2 \geq M$ (recall that we have assumed $N_1 \geq N_2$).

C.1 $M \geq N_1 \geq N_2$

Lemma 1: The following inequality holds:

$$N_1 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n}h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H})\right\} \geq N_2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n}h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})\right\}. \quad (8)$$

Before getting to the proof of this, let us consider a simpler case wherein $N_1 = N_2 = N$ ($< M$) and the fading matrices $A(t)$ and $H(t)$ are i.i.d. Then, by symmetry, (in fact, the channel is degraded both ways) both the receivers must be able to decode both the messages. This implies that $d_1 + d_2 \leq N$. Also, by symmetry, we have that $h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H}) = h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})$. Lemma 1 generalizes this result.

---

[6] Note that it is only for the sake of illustration that we use the quantities, $h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H})$ and $h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})$, in our explanation. The actual terms involved in [4] are different and more complicated than (but in some sense the direct analogues of) the ones we use here. To get this fraction of $\frac{1}{2}$ under partial CSIT (although for a tighter result we need it to be unity) required a considerable work.

Proof: Consider random variables $\tilde{\mathbf{Y}}_1$, $\tilde{\mathbf{Y}}_2$, $\cdots$, $\tilde{\mathbf{Y}}_{N_1}$, $\tilde{\mathbf{Z}}_1$, $\tilde{\mathbf{Z}}_2$, $\cdots$, $\tilde{\mathbf{Z}}_{N_2}$. By symmetry, it is clear that if we consider any subset of these random variables of size, say K, then their conditional joint distribution is the same. Hence, we get

$$h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H}) = h(\tilde{\mathbf{Y}}_1, \tilde{\mathbf{Y}}_2, \cdots, \tilde{\mathbf{Y}}_{N_2}|M_Z, \mathbf{A}, \mathbf{H}). \tag{9}$$

Further, since conditioning reduces entropy,

$$\begin{aligned}(N_1 - N_2) \cdot h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H}) &\geq (N_1 - N_2) \cdot N_2 \cdot h(\tilde{\mathbf{Z}}_{N_2}|M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Z}}_1, \cdots, \tilde{\mathbf{Z}}_{N_2-1}) \\ &\geq N_2 \cdot (N_1 - N_2) \cdot h(\tilde{\mathbf{Y}}_{N_2+1}|M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Y}}_1, \tilde{\mathbf{Y}}_2, \cdots, \tilde{\mathbf{Y}}_{N_2}) \\ &\geq N_2 \cdot h(\tilde{\mathbf{Y}}_{N_2+1}, \tilde{\mathbf{Y}}_{N_2+2}, \cdots, \tilde{\mathbf{Y}}_{N_1}|M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Y}}_1, \tilde{\mathbf{Y}}_2, \cdots, \tilde{\mathbf{Y}}_{N_2})\end{aligned}$$

To complete the proof, add N_2 times equation (9) to the above equation. ■

C.2 $N_1 > M > N_2$

Lemma 2: The following inequality holds:

$$M \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Z}}|M_Z, \mathbf{A}, \mathbf{H})\right\} \geq N_2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})\right\}. \tag{10}$$

Proof: Let us first analyze $\mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})\right\}$. Although there are N_1 receive antennas at receiver 1, there are only $M < N_1$ transmit antennas. Further we can assume, without loss of generality, that the first M rows of the channel matrix $h_{\max}(t)a(t)^{-1}A(t)$ are linearly independent with probability one.

$$\begin{aligned}&\mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}|M_Z, \mathbf{A}, \mathbf{H})\right\} = \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}_1, \cdots, \tilde{\mathbf{Y}}_M, \tilde{\mathbf{Y}}_{M+1}, \cdots, \tilde{\mathbf{Y}}_{N_1}|M_Z, \mathbf{A}, \mathbf{H})\right\} \\ &\quad = \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}_1, \cdots, \tilde{\mathbf{Y}}_M|M_Z, \mathbf{A}, \mathbf{H}) + \lim_n \frac{1}{n} h(\tilde{\mathbf{Y}}_{M+1}, \cdots, \tilde{\mathbf{Y}}_{N_1}|M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Y}}_1, \cdots, \tilde{\mathbf{Y}}_M)\right\}.\end{aligned}$$

We now prove that $\mathrm{MG}\left\{\lim \frac{1}{n} h(\tilde{\mathbf{Y}}_{M+1}, \cdots, \tilde{\mathbf{Y}}_{N_1}|M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Y}}_1, \cdots, \tilde{\mathbf{Y}}_M)\right\} = 0$.

To this end, consider the point-to-point Gaussian $M \times N$ MIMO channel defined by $Y_i = H_i X + W_i$, $i = 1, \cdots, N$, where $M > N$, row vectors $\{H_i\}$s are such that if we take any m of these and stack them to form a $m \times M$ matrix then the resulting matrix has a rank of $\min(m, M)$ with probability one; and W_i's are i.i.d. $\mathcal{CN}(0,1)$. Given $Y_1, \cdots, Y_M$, and H, we can reconstruct a noisy version of the input signal X as follows:

$$\bar{Y} = \begin{bmatrix} H_1 \\ \vdots \\ H_M \end{bmatrix}^{-1} \begin{bmatrix} Y_1 \\ \vdots \\ Y_M \end{bmatrix} = X + \begin{bmatrix} H_1 \\ \vdots \\ H_M \end{bmatrix}^{-1} \begin{bmatrix} W_1 \\ \vdots \\ W_M \end{bmatrix}.$$

Then subtracting $\begin{bmatrix} H_{M+1} \\ \vdots \\ H_{N_1} \end{bmatrix} \bar{Y}$ from $\begin{bmatrix} Y_{M+1} \\ \vdots \\ Y_{N_1} \end{bmatrix}$ (to get $\bar{Y}'$), we see that $\text{MG}\{h(Y_{M+1}, \cdots, Y_{N_1} | H, Y_1, \cdots, Y_M)\} = 0$ because $\bar{Y}'$ involves only the noise terms. Following this argument, it can be shown that $\text{MG}\left\{\lim \frac{1}{n} h(\tilde{\mathbf{Y}}_{M+1}, \cdots, \tilde{\mathbf{Y}}_{N_1} | M_Z, \mathbf{A}, \mathbf{H}, \tilde{\mathbf{Y}}_1, \cdots, \tilde{\mathbf{Y}}_M)\right\} = 0$. Now, the techniques developed in Lemma 1 can be used directly to prove the required result. ■

C.3 $N_1 \geq N_2 \geq M$

The inequality (7) follows directly by Lemma 2. Furthermore, under this configuration, when there is perfect CSIT, the dof region is given by $d_1 + d_2 \leq M$. But, this is clearly achievable even with no CSIT by simple time division.

Theorem 1 is thus proved.

Remark 3: The inequality (7) will also appear (possibly, in a different form) in the analysis of the dof regions of the multi-user BC, the IC, and the CRC. Its proof therefore warrants further discussion. Note that in the inequality (7), both conditional entropies involve random variables M_Z, $\mathbf{A}$, and $\mathbf{H}$ under conditioning. However, it does not really matter if M_Z is present or not, or some other variable is present instead. What is important is that both the conditional entropies are at least conditioned on all the channel matrices (over the entire block-length) and the rest of the variables under conditioning are the same in both terms. This observation is used later in analyzing the dof regions of the multi-user BC, the IC, and the CRC.

Remark 4: Consider a BC with a slightly different definition of the fading processes and the additive noises. Let f be a row random vector with differential entropy greater than $-\infty$. The rows of $A(t)$ and $H(t)$ are i.i.d. according to f. Again assume that if we pick any m rows out of $A(t)$ (or $H(t)$) the resulting matrix has rank of $\min(m, M)$ with probability 1. Let the entries of $W(t)$ and $W'(t)$ to be i.i.d. zero-mean and variance-1 but not necessarily Gaussian, i.e., they have some arbitrary distribution such that the differential entropy is greater than $-\infty$. It can be easily shown that for the BC with such a distribution for the fading processes and the additive noises, Theorem 1 can be proved. Note that in this case we can start directly with inequalities in (4), instead of deriving (5) and (6) and then working with them as done earlier.

III. The Multi-User MIMO BC

A. Channel Model

Consider the K-user MIMO BC with $M > 1$ transmit antennas and users (1 through K) with N_1, $\cdots$, N_K receive antennas, respectively. Assume without loss of generality that the users are ordered such that the number of receive antennas are in decreasing order, i.e., $N_1 \geq N_2 \geq \cdots \geq N_K$. The input-output relationship is given by

$$Y^i(t) = H^i(t)X(t) + W^i(t), \tag{11}$$

where $H^i(t) \in \mathcal{C}^{N_i \times M}$ is the fading channel matrix corresponding to the i^{th} user and other variables $Y^i(t)$, $X(t)$, and $W^i(t)$ are defined in an analogous fashion. The additive noises

$\{W^i(t)\}$, i.i.d. across time, have entries which are i.i.d. $\mathcal{CN}(0,1)$. Assume perfect CSIR but no CSIT.

In the case of the two-user MIMO BC, by taking a unit-norm row random vector for the direction and a set of non-negative random variables for the norms, we defined the distribution of two fading matrices, namely, $A(t)$ and $H(t)$. The same definition is extended here to define the distribution of K channel matrices $\{H^i\}_{i=1}^K$. Also analogously define $\tilde{Y}^i(t)$.

Consider any coding scheme that achieves the rate-tuple $(R_1, \cdots, R_n)$. Let M_i be the message (all independent) to be sent to the i^{th} user in a block-length of n; it is uniform over the set $\mathcal{M}_i$ of cardinality 2^{nR_i}. Also, these are independent. We define the achievability of the rate-tuple and the capacity region $\mathcal{C}(P)$ as the natural extensions of the corresponding definitions in the case of two-user BC. The dof region is defined as

$$\mathbf{D} = \{(d_1, \cdots, d_n) \mid d_i \geq 0 \text{ and } \exists\ (R_1(P), \cdots, R_n(P)) \in \mathcal{C}(P) \text{ such that } d_i = MG(R_i(P))\ \forall\ i\}\,.$$

B. *The DoF Region of the Multi-User MIMO BC*

Using the scalar upper-bound derived in [3], it is clear that for the $M \times 1 \cdots K$ BC with no CSIT, the dof region is given by $d_1 + d_2 + \cdots + d_n \leq 1$. This result is generalized here to the case of multiple-antenna receivers.

Theorem 2: The dof region of the multi-user MIMO BC defined in the previous seciton is given by

$$\mathbf{D} = \left\{ (d_1, \cdots, d_n) \middle| d_i \geq 0\ \forall\ i,\ \frac{d_1}{\min(M, N_1)} + \frac{d_2}{\min(M, N_2)} + \cdots \frac{d_K}{\min(M, N_K)} \leq 1 \right\}. \quad (12)$$

C. *Proof*

We start again with Fano's inequality. Let us assume that user i knows the messages M_{i+1} through M_K (denoted as $M_{K:i+1}$). Also let $\mathbf{H}$ denote the collection of random variables

$\mathbf{H^1}$, $\cdots$, $\mathbf{H^K}$. As in the case of two-user BC, we can upper-bound the rate of the i^{th} user as

$$R_i \leq \lim_n I(M_i; \mathbf{\tilde{Y}^i}|\mathbf{H}, M_{K:i+1}) \leq \lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^i}|M_{K:i+1}, \mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^i}|M_{K:i}, \mathbf{H}), \tag{13}$$

where $M_{K:K+1} = \phi$ is some deterministic number.

We will again work in terms of the multiplexing gains of these quantities. Let us define $x_i = \min(N_i, M)$. It is easy to see that

$$\frac{1}{x_K} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^K}|\phi, \mathbf{H})\right\} \leq 1 \text{ and } \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^1}|M_{K:1}, \mathbf{H})\right\} = 0. \tag{14}$$

Now based on the bound on R_1, we see that

$$\frac{1}{x_1} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^1}|M_{K:2}, \mathbf{H})\right\} \geq \frac{d_1}{x_1}. \tag{15}$$

Then following the proof of inequality (7) of the two-user case, it can be shown that

$$\frac{1}{x_2} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^2}|M_{K:2}, \mathbf{H})\right\} \geq \frac{1}{x_1} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^1}|M_{K:2}, \mathbf{H})\right\} \geq \frac{d_1}{x_1}. \tag{16}$$

Now using the bound on R_2, one can prove that

$$\begin{aligned} \frac{1}{x_2} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^2}|M_{K:3}, \mathbf{H})\right\} &\geq \frac{d_2}{x_2} + \frac{1}{x_2} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^2}|M_{K:2}, \mathbf{H})\right\} \\ &\geq \frac{d_2}{x_2} + \frac{d_1}{x_1}. \end{aligned} \tag{17}$$

Next, just like (16), we can prove that

$$\frac{1}{x_3} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^3}|M_{K:3}, \mathbf{H})\right\} \geq \frac{1}{x_2} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^2}|M_{K:3}, \mathbf{H})\right\} \geq \frac{d_2}{x_2} + \frac{d_1}{x_1}. \tag{18}$$

Again, based on the bound on R_3, we get

$$\begin{aligned} \frac{1}{x_3} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^3}|M_{K:4}, \mathbf{H})\right\} &\geq \frac{d_3}{x_3} + \frac{1}{x_3} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^3}|M_{K:3}, \mathbf{H})\right\} \\ &\geq \frac{d_3}{x_3} + \frac{d_2}{x_2} + \frac{d_1}{x_1}. \end{aligned} \tag{19}$$

Working recursively this way, at the last step, we obtain

$$1 \geq \frac{1}{x_K} \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{\tilde{Y}^K}|\phi, \mathbf{H})\right\} \geq \frac{d_K}{x_K} + \frac{d_{K-1}}{x_{K-1}} + \cdots + \frac{d_2}{x_2} + \frac{d_1}{x_1}, \tag{20}$$

which is the desired inequality.

IV. The Two-User MIMO IC

A. Channel Model

Consider the two-user MIMO IC wherein the transmitters, 1 and 2, have M_1 and M_2 antennas, respectively, while the receivers, 1 and 2, have N_1 and N_2 receive antennas, respectively. A given transmitter has a message only for its respective/paired receiver. However, its signal is received at the unintended receiver as the interference. The input-output relationship is given by

$$Y(t) = H^{11}(t)X^1(t) + H^{12}(t)X^2(t) + W(t), \tag{21}$$

$$Z(t) = H^{21}(t)X^1(t) + H^{22}(t)X^2(t) + W'(t), \tag{22}$$

where at the t^{th} channel use, $Y(t)$ and $Z(t)$ are the received signals; $X^1(t)$ and $X^2(t)$ are the transmitted signals; $W(t)$ and $W'(t)$ are the additive noises; $H^{11}(t) \in \mathcal{C}^{N_1 \times M_1}$, $H^{12}(t) \in \mathcal{C}^{N_1 \times M_2}$, $H^{21}(t) \in \mathcal{C}^{N_2 \times M_1}$, and $H^{22}(t) \in \mathcal{C}^{N_2 \times M_2}$ are the fading channel matrices; and there is a power constraint of P at both the transmitters. We assume that all the channel matrices are perfectly and instantaneously known at both the receivers whereas the transmitters know only the distribution of these, i.e., perfect CSIR but no CSIT.

We let the entries of $W(t)$ and $W'(t)$ to be i.i.d. zero-mean variance-1 and have some arbitrary distribution such that the differential entropy is greater than $-\infty$. Also the noise realizations are i.i.d. across time.

Consider the distribution of the fading processes. Let $f \in \mathcal{C}^{1 \times (M_1+M_2)}$ be a row random vector having some probability density and with differential entropy $> -\infty$. Consider $H^1 \in \mathcal{C}^{N_1 \times (M_1+M_2)}$ (and $H^2 \in \mathcal{C}^{N_2 \times (M_1+M_2)}$) such that the rows of this matrix are distributed i.i.d. according to f. Then define $H^{11} \in \mathcal{C}^{N_1 \times M_1}$ and $H^{12} \in \mathcal{C}^{N_1 \times M_2}$ such that $H^1 = [H^{11}\, H^{12}]$; similarly define $H^{21} \in \mathcal{C}^{N_2 \times M_1}$ and $H^{22} \in \mathcal{C}^{N_2 \times M_2}$ such that $H^2 = [H^{21}\, H^{22}]$. Now, $H^{11}(t)$ is i.i.d. (across time) according to H^{11}, and similarly for the other fading matrices. We assume that if you take any m rows out of any of the matrices H^{11}, H^{12}, H^{1}, H^{21}, H^{22}, or H^{2} then the resulting matrix is full rank with probability 1.

Note that in [14] the authors consider the case of i.i.d. Rayleigh fading and white Gaussian noise. The distributions of the fading matrices and the additive noises taken here are more general than those in [14]. Furthermore, as far as [15] is concerned, one can find the examples of ICs which would be included in our model (described above) but not in the one considered in [15] and vice versa.

Let M_Y and M_Z to be the (independent) messages intended for receivers 1 and 2, respectively. The rate pair (R_1, R_2) is said to be achievable if the probability of error in decoding messages M_Y and M_Z (sent at rates R_1 and R_2, respectively) goes to zero as the blocklength tends to infinity. Then the capacity region $\mathcal{C}(P)$ is the set of all achievable rate pairs when the power constraint is P. Note that the transmitted codeword $\mathbf{X^1}$ is independent of M_Z and vice versa. Furthermore, the transmitted codewords $\mathbf{X^1}$ and $\mathbf{X^2}$ are independent of the fading processes and the additive noises. Also note that receiver 1 is interested in decoding only M_Y and vice versa. The dof region is then defined as

$$\mathbf{D} = \left\{ (d_1, d_2) \middle| d_1, d_2 \geq 0 \text{ and } \exists\, (R_1(P), R_2(P)) \in C(P) \text{ such that } d_i = \lim_{P\to\infty} \frac{R_i(P)}{\log P}, i = 1, 2 \right\}. \tag{23}$$

Also denote by $\mathbf{H}$ the collection of random variables $\mathbf{H^{11}}$, $\mathbf{H^{12}}$, $\mathbf{H^{21}}$, and $\mathbf{H^{22}}$.

B. An inner-bound to the DoF Region

Let us consider that we want to achieve $d_1 = \min(M_1, N_1)$, i.e., the maximum that can be achieved for the first user. Then, what is the maximum dof that are known to be achievable for the second user? Let us suppose that the second user transmits d_2 streams. Due to lack of CSIT, the transmitters can not employ any intelligent technique like zero-forcing beam-forming, using which the achievability of the dof region for the MIMO IC with perfect CSIT has been shown in [8]. As a result, the first receiver has to treat the interference due to these d_2 streams as noise. Hence, for $d_1 = \min(M_1, N_1)$ to be achievable, the second transmitter is constrained to send at most $\min(M_2, N_1 - \min(M_1, N_1)) = \min(M_2, (N_1 - M_1)^+)$ streams, where $(N_1 - M_1)^+ = \max(N_1 - M_1, 0)$. Then receiver 2 receives in total $\min(M_1, N_1) + \min(M_2, (N_1 - M_1)^+)$ streams out of which $\min(M_1, N_1)$ are the interference streams for it. Therefore, we can achieve $d_2 = \min(N_2, \min(M_1, N_1) + \min(M_2, (N_1 - M_1)^+) - \min(N_2, \min(M_1, N_1))$, which can be written as $d_2 = \min\left\{N_2, N_1 - ((N_1 - M_1)^+ - M_2)^+\right\} - \min(N_2, N_1, M_1)$.

At this point, we invoke symmetry to claim the achievability of the following two points:

$$P_1 \equiv (d_1, d_2) = \Big(\min(M_1, N_1), \min\Big\{N_2, N_1 - \big((N_1 - M_1)^+ - M_2\big)^+\Big\} - \min(N_2, N_1, M_1)\Big),$$
$$P_2 \equiv (d_1, d_2) = \Big(\min\Big\{N_1, N_2 - \big((N_2 - M_2)^+ - M_1\big)^+\Big\} - \min(N_1, N_2, M_2), \min(N_2, M_2)\Big).$$

Define d_1^*, $d_2^* \geq 0$ are such that the line $\frac{d_1}{d_1^*} + \frac{d_2}{d_2^*} = 1$ passes through these points. We then have the following inner-bound [7].

Proposition 1: The following region is an inner-bound on the dof region $\mathbf{D}$.

$$\mathbf{D}_{\text{inner}} = \left\{(d_1, d_2) \mid d_1,\ d_2 \geq 0, d_1 \leq \min(M_1, N_1),\ d_2 \leq \min(M_2, N_2),\ \frac{d_1}{d_1^*} + \frac{d_2}{d_2^*} \leq 1\right\}. \quad (24)$$

We refer in the sequel to the bound on the weighted sum of d_1 and d_2 that appears above, namely, $\frac{d_1}{d_1^*} + \frac{d_2}{d_2^*} \leq 1$ as the 'inner-bound on the weighted sum'.

In Fig. 2, we plot the typical shape of $\mathbf{D}_{\text{inner}}$. Note that depending upon the relative values of M_1, M_2, N_1, and N_2, it is possible that point P_1 is on d_1-axis and/or point P_2 is on d_2-axis.

---

[7] Certain variables like P_1, P_2, $\mathbf{D}^{csit}$, d_1^*, d_2^*, $\mathbf{D}_{\text{inner}}$, $\mathbf{D}_{\text{outer}}$, etc. are used both for the IC and the CRC. The meaning is to be understood by the context. Also, the inner-bounds on the dof regions of the IC and the CRC presented here are well-known from the literature. These are derived here just for the sake of completeness.

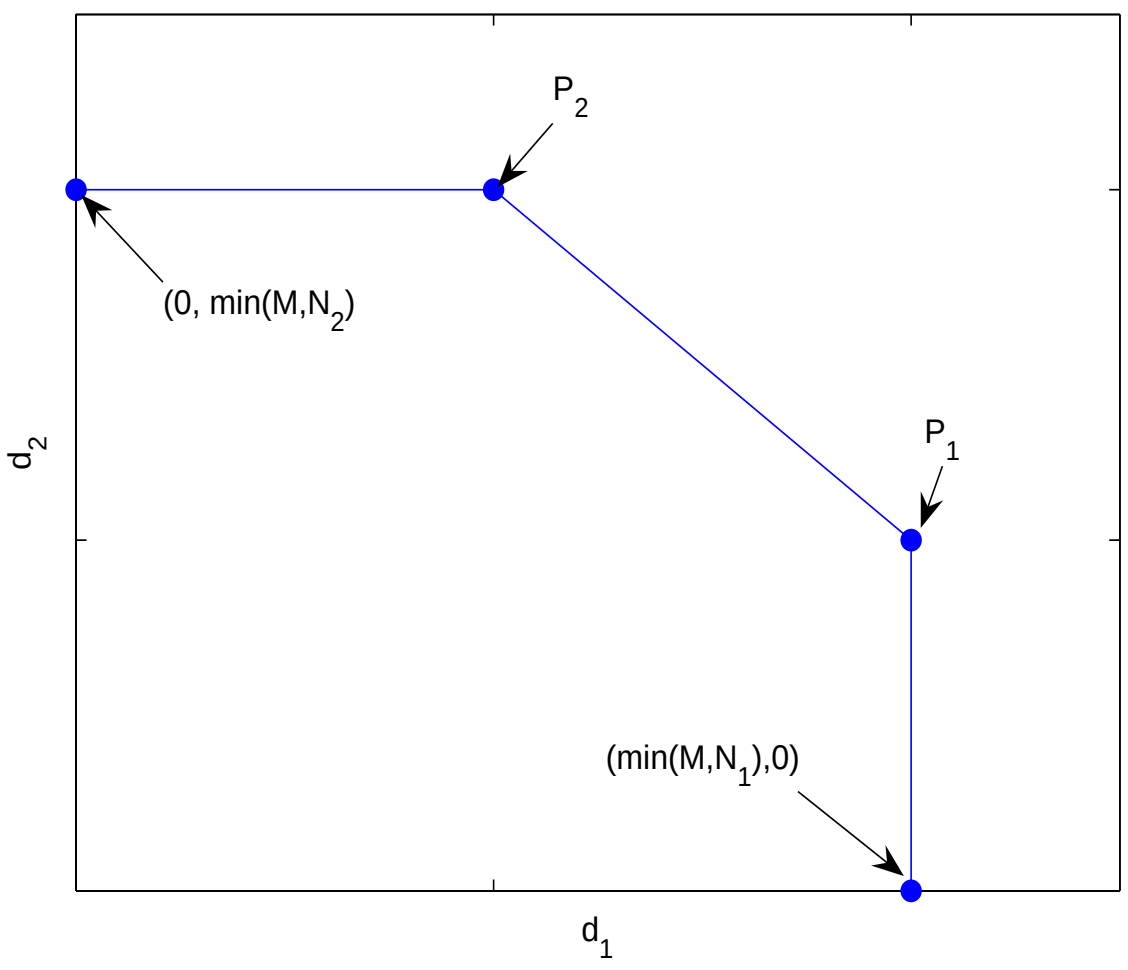

Fig. 2
THE INNER-BOUND FOR THE IC: TYPICAL SHAPE

V. THE OUTER-BOUND AND THE DOF REGION OF THE MIMO IC

The outer-bound, by definition, is the set of conditions that any $(d_1, d_2) \in \mathbf{D}$ must satisfy. Therefore, the rectangular region defined by $d_1 \leq \min(M_1, N_1)$ and $d_2 \leq \min(M_2, N_2)$ is an outer-bound. To get a tighter outer-bound, seeing the shape and defining equations of the inner-bound, one may guess that we need one additional bound of the form $\frac{d_1}{(d_1^*)'} + \frac{d_2}{(d_2^*)'} \leq 1$, $(d_1^*)'$, $(d_2^*)' > 0$, which any $(d_1, d_2) \in \mathbf{D}$ must satisfy. We call this bound as the 'outer-bound on the weighted sum'. In fact, the constants $(d_1^*)'$ and $(d_2^*)'$ can not be arbitrary and must be chosen appropriately. If we can derive the outer-bound on the weighted sum so that $(d_1^*)' = d_1^*$ and $(d_2^*)' = d_2^*$ then the inner and the outer-bounds on the dof region will match and it will yield us the exact characterization of the dof region.

We divide the analysis into four cases:

Case A: $N_1 \leq M_1$ and $N_2 \leq M_2$;

Case B: $N_1 > M_1$ and $N_2 \leq M_2$;

Case C: $N_1 \leq M_1$ and $N_2 > M_2$;

Case D: $N_1 > M_1$ and $N_2 > M_2$.

We deal with each case separately and derive an outer-bound on the weighted sum. We first present the summary of the results we have and then we will carry out the analysis case-by-case.

Remark 5: Let $\mathbf{D}^{csit}$ denote the perfect-CSIT dof region of the IC. It is given by [8]

$$\begin{aligned}\mathbf{D}^{csit} = \{(d_1, d_2)\,|d_1, d_2 \geq 0, d_1 \leq \min(M, N_1), d_2 \leq \min(M, N_2),\\ d_1 + d_2 \leq \min\{M_1 + M_2, N_1 + N_2, \max(M_1, N_2), \max(M_2, N_1)\}\}.\end{aligned} \tag{25}$$

Remark 6: Let $\mathbf{D}_{\text{outer}}$ represent the outer-bound on the dof region. Then we have the following results.

Case A: $N_1 \leq M_1$ and $N_2 \leq M_2$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. We thus know the dof region.

Case B: $N_1 > M_1$ and $N_2 \leq M_2$:

- $N_2 \leq N_1$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. Additionally, if $N_1 \geq N_2 \geq M_1$, then $\mathbf{D} = \mathbf{D}^{csit}$.
- $N_2 > N_1$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$, i.e., the inner and outer bounds do not match. The outer-bound is presented in Theorem 5.

Case C: $N_1 \leq M_1$ and $N_2 > M_2$:

- $N_1 \leq N_2$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. Additionally, if $N_2 \geq N_1 \geq M_2$, then $\mathbf{D} = \mathbf{D}^{csit}$.
- $N_1 > N_2$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. The outer-bound can be obtained from Theorem 5 by invoking symmetry.

Case D: $N_1 > M_1$ and $N_2 > M_2$:

- $N_1 > M_2$ and $N_2 > M_1$: $\mathbf{D} = \mathbf{D}^{csit} = \mathbf{D}_{\text{inner}}$.
- $N_1 > M_2$ and $N_2 \leq M_1$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. The outer-bound is presented in Theorem 7. If $M_1 = N_2$ then $\mathbf{D} = \mathbf{D}_{\text{inner}} = \mathbf{D}^{csit}$.
- $N_2 > M_1$ and $N_1 \leq M_1$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. The outer-bound can be obtained from Theorem 7 by invoking symmetry. If $M_2 = N_1$ then $\mathbf{D} = \mathbf{D}_{\text{inner}} = \mathbf{D}^{csit}$.

We now prove below the claims made in the above remark. We want to derive the appropriate outer-bound on the weighted sum which matches with the corresponding inner-bound (to then have the dof region), else at least provide a tight outer-bound.

A. $N_1 \leq M_1$ and $N_2 \leq M_2$

It can be verified that for the IC with such an antenna configuration, $P_1 \equiv (N_1, 0)$ and $P_2 \equiv (0, N_2)$. This implies that $d_1^* = N_1$ and $d_2^* = N_2$. Hence the inner-bound on the weighted sum is $\frac{d_1}{N_1} + \frac{d_2}{N_2} \leq 1$.

To derive an outer-bound on the weighted sum, let us assume that both the transmitters cooperate. The dof region of the resulting BC will provide an outer-bound on the dof region of the IC. We call this outer-bound the 'overall BC outer-bound'. Now, in the light of Remark 4, we can obtain the dof region of the resulting BC using Theorem 1. Hence, we get the outer-bound on the weighted sum as $\frac{d_1}{N_1} + \frac{d_2}{N_2} \leq 1$ which matches with the corresponding inner-bound; hence the following theorem.

Theorem 3: For the MIMO IC with $N_1 \leq M_1$ and $N_2 \leq M_2$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 1.

B. $N_1 > M_1$ and $N_2 \leq M_2$

In Remark 6, we have two subcases: $N_2 \leq N_1$ and $N_2 > N_1$. However, in the proof here, the two subdivisions considered are different from those in the remark. Later we will combine these subcases appropriately to yield the ones in the remark.

B.1 $N_2 < M_1 \Rightarrow N_1 > M_1 > N_2$ and $N_2 \leq M_2$

Particularizing Proposition 1 to this case, we can obtain the inner-bound on the weighted sum as $\frac{d_1}{M_1} + \frac{d_2}{N_2} \leq 1$. We will prove that this is also an outer-bound on the weighted sum; thus establishing the dof region.

Note that $M_Y \rightarrow \mathbf{X^1} \rightarrow (\mathbf{Y}, \mathbf{Z})$ and $M_Z \rightarrow \mathbf{X^2} \rightarrow (\mathbf{Y}, \mathbf{Z})$ form markov chains. Then assuming that receiver 1 knows $\mathbf{X^2}$, we apply Fano's inequality

$$R_2 \leq \lim_n \frac{1}{n} I(\mathbf{X^2}; \mathbf{Z}|\mathbf{H}) \leq \lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{X^2}, \mathbf{H}), \tag{26}$$

$$R_1 \leq \lim_n \frac{1}{n} I(\mathbf{X^1}; \mathbf{Y}|\mathbf{X^2}, \mathbf{H}) \leq \lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^2}, \mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^2}, \mathbf{X^1}, \mathbf{H}). \tag{27}$$

We can show that $\mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{H})\right\} \leq N_2$ and $\mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^2}, \mathbf{X^1}, \mathbf{H})\right\} = 0$. Using the techniques developed during the analysis of the BC, it is not difficult to prove the following lemma.

Lemma 3: The following inequality holds:

$$M_1 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{X^2}, \mathbf{H})\right\} \geq N_2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^2}, \mathbf{H})\right\} \tag{28}$$

Proof: Note that given $\mathbf{X^2}$, the IC is just equivalent (as far as the proof goes) to the BC with M_1 transmit and two users with N_1 ($> M_1$) and N_2 ($\leq M_1$) receive antennas. This enables us to use the techniques already developed in Section II.

Note that $h(\mathbf{Z}|\mathbf{X^2}, \mathbf{H}) = h(\mathbf{Z} - \mathbf{H^{22}}\mathbf{X^2}|\mathbf{X^2}, \mathbf{H})$ because translation does not change differential entropy. Define $\mathbf{Z}' = \mathbf{Z} - \mathbf{H^{22}}\mathbf{X^2}$ and $\mathbf{Y}' = \mathbf{Y} - \mathbf{H^{12}}\mathbf{X^2}$. Further, $\mathbf{H^{21}}$ and $\mathbf{H^{11}}$ are i.i.d. by the assumption on the fading processes. This implies that if take any K random variables out of $\mathbf{Y}'_1, \cdots, \mathbf{Y}'_{N_1}, \mathbf{Z}'_1, \cdots, \mathbf{Z}'_{N_2}$ then their conditional joint distribution (conditioned on relevant random variables) would be the same. Further, recall Remark 3 about the dependence of the proof of inequality (7) on the random variables that appear under conditioning in conditional differential entropies. It should now be fairly clear that we can extend the proof of Lemma 2 to prove this lemma. ■

Using this lemma, we get the outer-bound on the weighted sum as $\frac{d_1}{M_1} + \frac{d_2}{N_2} \leq 1$. Therefore, in this case, the region $\mathbf{D}_{\text{inner}}$ is in fact the dof region. This result is captured in Theorem 4.

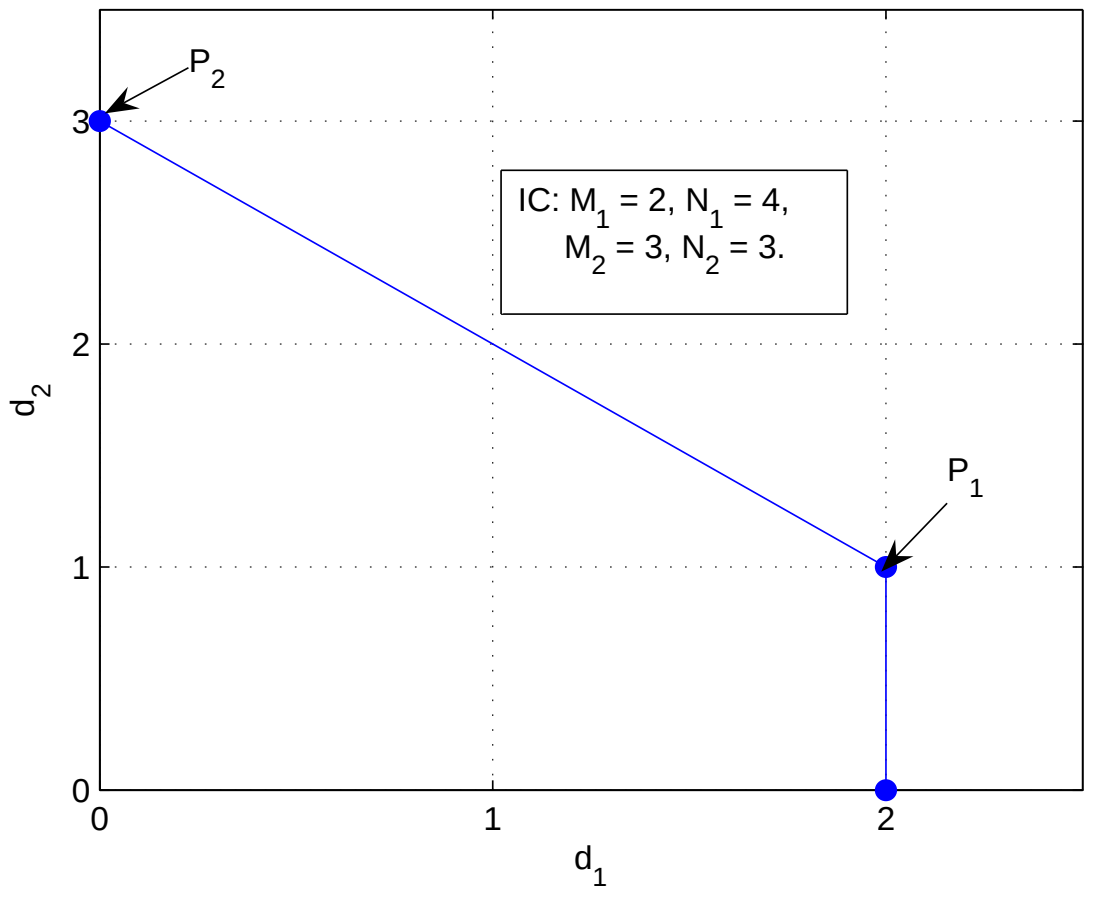

Fig. 3
IC: Case B.2.a: The dof region

B.2 $N_2 \geq M_1$

We consider the following two cases separately.

B.2.a $N_2 \leq N_1 \Rightarrow N_1 \geq N_2 \geq M_1,\ N_1 > M_1,$ and $N_2 \leq M_2$

Proceeding as in Subsection B.1, it can be shown that the outer-bound on the weighted sum is $d_1 + d_2 \leq N_2$, which coincides with the corresponding inner-bound. Thus we have established the dof region for this case.

Let us evaluate $\mathbf{D}^{csit}$ given in Remark 5. It is given by $d_1 \leq M_1$ and $d_1 + d_2 \leq N_2$. Thus, $\mathbf{D} = \mathbf{D}^{csit}$, as claimed in the remark.

Fig. 3 shows the dof region of one example IC that satisfies the conditions of this case.

Observe that the case of Subsection B.1 can be combined with that of the present to yield actually the first subcase of Case B presented in Remark 6. Therefore, corresponding to that subcase, we have the following theorem.

Theorem 4: For the MIMO IC with $N_1 > M_1$, $N_2 \leq M_2$, and $N_2 \leq N_1$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 1.

Consider the IC in the above theorem, i.e., the one with $N_1 > M_1$, $N_2 \leq M_2$, and $N_2 \leq N_1$. When $N_1 \geq N_2 \geq M_1$, we have $\mathbf{D} = \mathbf{D}^{csit}$, whereas if $N_1 > M_1 > N_2$ then $\mathbf{D} \subset \mathbf{D}^{csit}$. The reason for such a difference in behavior is precisely the availability of more receive antennas; in the former case, $N_2 \geq M_1$ while for the latter, $N_2 < M_1$.

B.2.b $N_2 > N_1 \Rightarrow M_2 \geq N_2 > N_1 > M_1$

This is the second subcase of Case B in Remark 6.

Let us derive the outer-bound. Assuming that $\mathbf{X^1}$ is known to the second receiver, we can get the following bounds through Fano's inequality:

$$R_1 \leq \lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^1}, \mathbf{H}), \tag{29}$$

$$R_2 \leq \lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{X^1}, \mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{X^1}, \mathbf{X^2}, \mathbf{H}). \tag{30}$$

The following lemma would now be quite obvious.

Lemma 4: The following inequality holds:

$$N_2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^1}, \mathbf{H})\right\} \geq N_1 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^1}, \mathbf{H})\right\} \tag{31}$$

This yields us the following outer-bound.

Theorem 5: Consider the MIMO IC with $M_2 \geq N_2 > N_1 > M_1$. The following region provides an outer-bound on the dof region

$$\mathbf{D}_{\text{outer}} = \left\{ (d_1, d_2) \middle| d_1, d_2 \geq 0, d_1 \leq M_1, \frac{d_1}{N_1} + \frac{d_2}{N_2} \leq 1 \right\}, \tag{32}$$

i.e., $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$.

Note, in this case, the overall BC outer-bound also yields the same outer-bound presented earlier.

The inner-bound on the weighted sum is the line joining points $P_1 \equiv (M_1, N_1 - M_1)$ and $P_2 \equiv (0, N_2)$. However, the line $\frac{d_1}{N_1} + \frac{d_2}{N_2} = 1$ in the above outer-bound passes through points

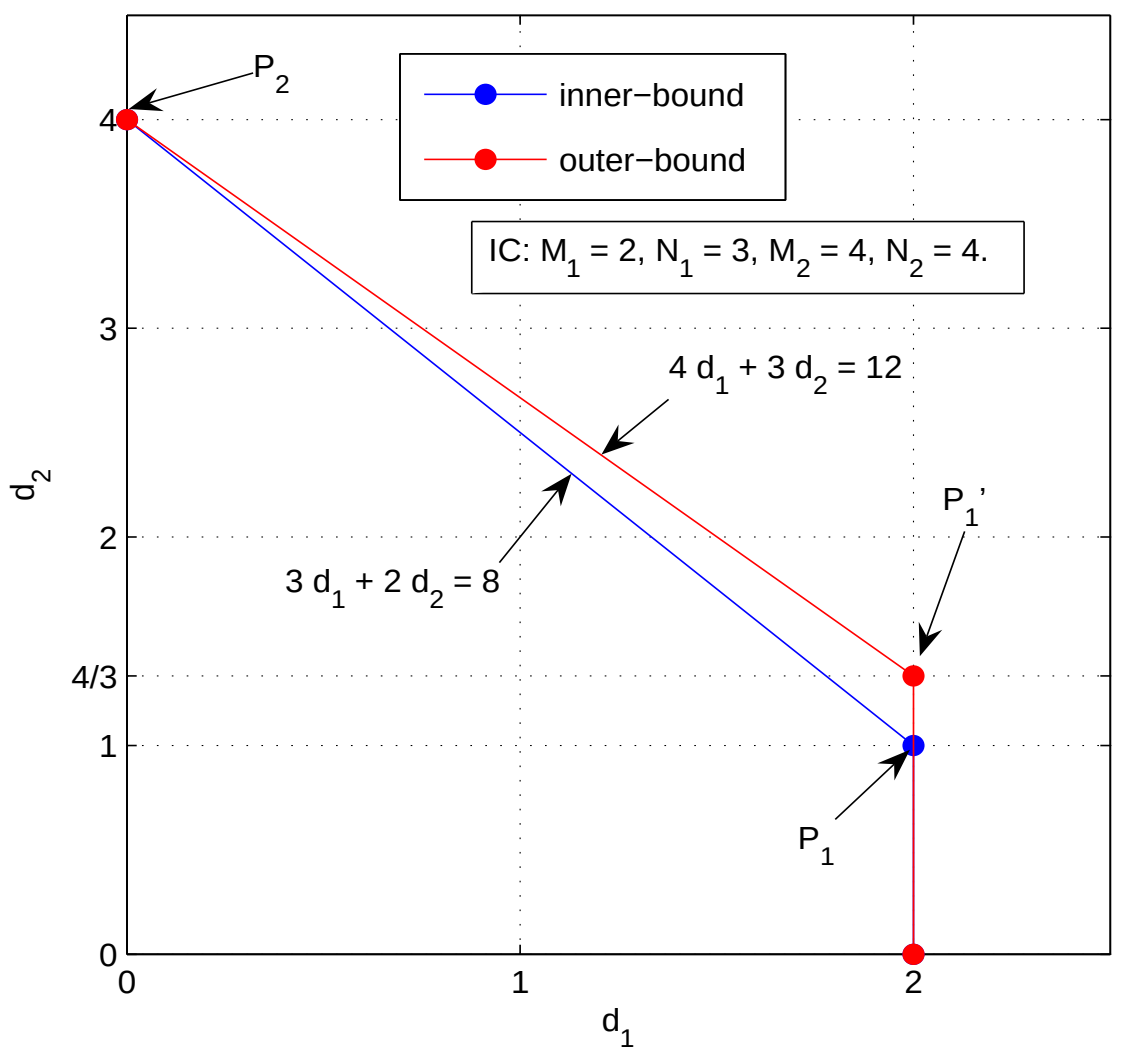

Fig. 4
IC: Case B.2.b: The inner and outer bounds on the dof region

$P_1' \equiv \left(M_1, (N_1 - M_1)\frac{N_2}{N_1}\right)$ and $P_2' \equiv (0, N_2)$. Now $N_2 > N_1$ implies that point P_1' is outside the known inner-bound. Unfortunately, it is not clear if this point is achievable. Hence in this case we have only an outer-bound on the dof region but not the exact characterization.

Consider an example of the IC with $M_1 = 2$, $N_1 = 3$, $M_2 = 4$, and $M_2 = 4$. The inner and outer bounds on the dof region of this IC are presented in Fig. 4. Point $P_1' \equiv (2, \frac{4}{3})$ is outside the inner-bound. The inner-bound on the weighted sum is $3d_1 + 2d_2 \leq 8$. Let us suppose we try to derive a bound on $3d_1$ through equation (29). Now, $3 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{H})\right\} \leq 9$. Thus to be able to prove that $3d_1 + 2d_2 \leq 8$, we need

$$3 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{X^1}, \mathbf{H})\right\} \geq 2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Z}|\mathbf{X^1}, \mathbf{H})\right\} + 1. \tag{33}$$

Note that the constant 1 that appears above comes from the fact that the difference between N_1 and M_1 is 1. Hence, the transmitter 2 can always send 1 stream and receiver 1 would still be able to achieve d_1 dof, regardless of d_1. In fact, if we assume that the second transmitter always transmits at least one stream, then we can prove (33). However, such an assumption has no justification, and in general, we do not know if (33) is true.

Note that for this case, [14], [15] also provide the same outer-bound that we have here in Theorem 5. Also the achievability of this outer-bound is not known.

C. $N_1 \leq M_1$ and $N_2 > M_2$

The analysis for this case follows from that of Case B due to symmetry.

D. $N_1 > M_1$ and $N_2 > M_2$

As in Remark 6, we divide the analysis into three subcases.

D.1 $N_2 > M_1, N_1 > M_2 \Rightarrow N_1, N_2 > M_1, M_2$

For this case, $\mathbf{D}^{csit}$ is defined by bounds $d_1 \leq M_1$, $d_2 \leq M_2$, and $d_1 + d_2 \leq \min(N_1, N_2, M_1 + M_2)$ [8], and certainly, $\mathbf{D}^{csit}$ is an outer-bound on $\mathbf{D}$. But, interestingly, if we explicitly evaluate $\mathbf{D}_{\text{inner}}$ for this case, we can see that $\mathbf{D}_{\text{inner}} = \mathbf{D}^{csit}$. Again the availability of enough receive antennas leads to such a behavior.

Theorem 6: For the MIMO IC with $N_1, N_2 > M_1, M_2$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 1.

D.2 $N_1 > M_2$ and $N_2 \leq M_1 \Rightarrow N_1 > M_1 \geq N_2 > M_2$

Again, we start with Fano's inequality with the assumption that $\mathbf{X^2}$ is known at the first receiver. Then it can be shown that the outer-bound on the weighted sum is $\frac{d_1}{M_1} + \frac{d_2}{N_2} \leq 1$.

The line $\frac{d_1}{M_1} + \frac{d_2}{N_2} = 1$ passes through points $P_1' \equiv (M_1, 0)$ and $P_2' \equiv \left(\frac{M_1}{N_2}(N_2 - M_2), M_2\right)$. However, the inner-bound on the weighted sum passes through points $P_1 \equiv (M_1, 0)$ and $P_2 \equiv (N_2 - M_2, M_2)$. Therefore, unless $M_1 = N_2$, the point P_2' is outside the inner-bound and hence it is not clear if it is achievable.

It can be verified that when $N_1 > M_1 = N_2 > M_2$, the dof region under no CSIT is equal to that under perfect CSIT.

Theorem 7: Consider the MIMO IC with $N_1 > M_1 \geq N_2 > M_2$. The following region provides an outer-bound on the dof region

$$\mathbf{D}_{\text{outer}} = \left\{ (d_1, d_2) \middle| d_1, d_2 \geq 0, d_1 \leq M_1, d_2 \leq M_2, \frac{d_1}{M_1} + \frac{d_2}{N_2} \leq 1 \right\}, \tag{34}$$

i.e., $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. However, if $M_1 = N_2$ then $\mathbf{D} = \mathbf{D}_{\text{outer}} = \mathbf{D}_{\text{inner}}$.

Also note that in the case of IC with $N_1 > M_1 > N_2 > M_2$, [14], [15] also provide only an outer-bound which matches with the one stated in the above theorem.

D.3 $N_2 > M_1$ and $N_1 \leq M_1 \Rightarrow N_2 > M_2 \geq N_1 > M_1$

The analysis of this case follows from that of the previous case by symmetry. This also concludes the analysis of all the cases.

Remark 7: Let us list the cases for which we have only the outer-bound on the dof region:

- $M_2 \geq N_2 > N_1 > M_1$,
- $M_1 \geq N_1 > N_2 > M_2$,
- $N_1 > M_1 > N_2 > M_2$,
- $N_2 > M_2 > N_1 > M_1$.

VI. THE TWO-USER MIMO CRC

A. Channel Model

The CRC is an IC with degraded message sets [9], [10]. The input-output relationship of the CRC is same as that of the IC. The CRC differs from the IC just because of one assumption, i.e., in the CRC, it is assumed that one of the transmitters (here, the second, also called the cognitive transmitter) knows the message of the other transmitter non-causally.

The receiver of the cognitive transmitter (CT) is called the cognitive receiver (CR) while the remaining transmitter-receiver pair is called the primary pair (PT and PR).

Because of the non-causal knowledge of the message of the primary transmitter, the cognitive transmitter, besides transmitting its own message, can also aid the primary transmitter to transmit its message.

Since the channel model of CRC is the same as that of the IC except for one extra assumption, all the definitions in IV.A apply here as well.

B. Inner-Bound on the Dof Region

Since the CT knows the message to be transmitted by the PT, the maximum dof that are achievable for the primary pair are $d_1 = \min(N_1, M_1 + M_2)$. Note, in the case of the IC, this is equal to $\min(N_1, M_1)$. Now, when $d_1 = \min(N_1, M_1 + M_2)$, we do not know how to achieve any positive dof for the CT-CR pair, i.e., $d_2 = 0$. This is because depending upon the relative values of N_1 and $M_1 + M_2$, either the CT uses all M_2 streams or all possible N_1 dof of the received signal-space of the PR are used up.

Let us find the maximum dof that we know how to achieve for the PT-PR pair when $d_2 = \min(M_2, N_2)$. Since the cognitive transmitter knows the message of the primary, while transmitting to the PR, the two transmitters can collaborate. Since the CT is transmitting $\min(M_2, N_2)$ streams to the CR, the number of streams the two transmitters can send to the PR must be less than or equal to $M_1 + M_2 - \min(M_2, N_2)$. At the same time, this number has to be less than or equal to $N_2 - \min(N_2, M_2)$ so that $d_2 = \min(M_2, N_2)$ is achievable. Thus the transmitters can send at most $\min(M_1 + M_2 - \min(M_2, N_2), (N_2 - M_2)^+)$ streams to the PR. It can be verified that this is equal to $\min(M_1, (N_2 - M_2)^+)$, which equals the corresponding number in the case of the IC. Therefore, given that $d_2 = \min(M_2, N_2)$, the maximum d_1, known to be achievable over the CRC, is equal to the corresponding maximum

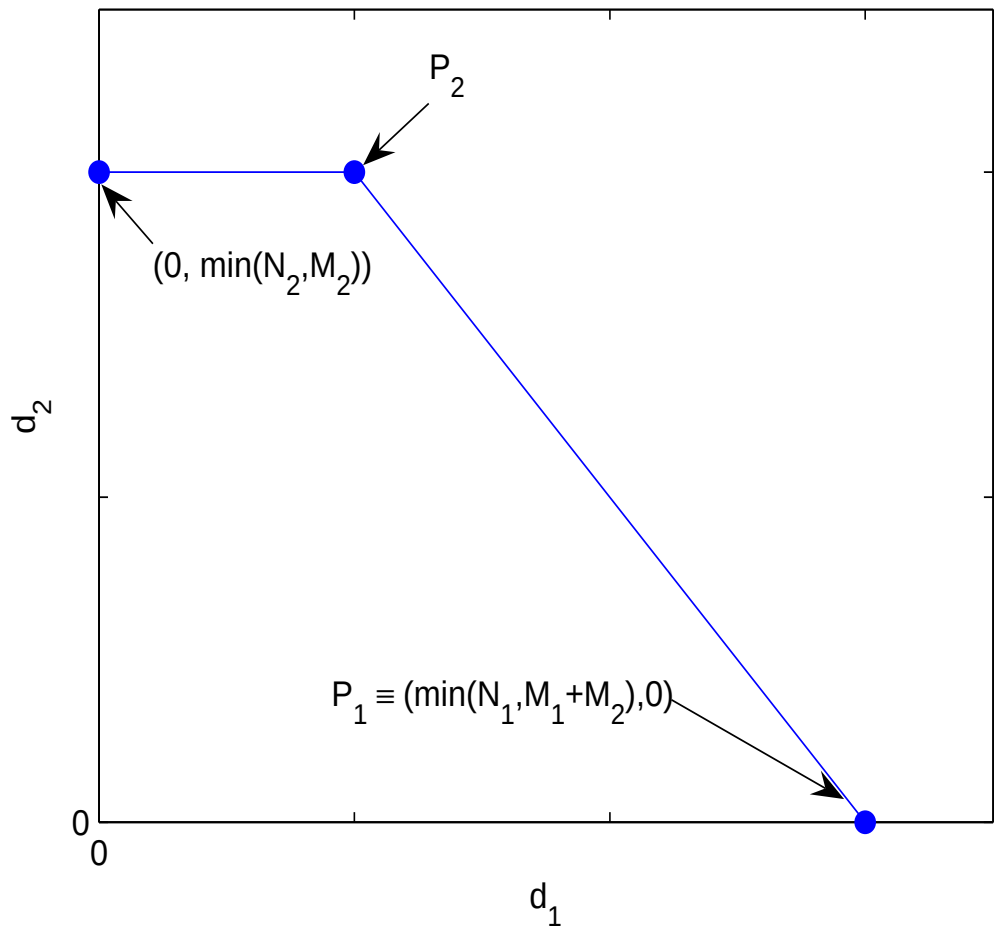

Fig. 5
CRC: TYPICAL SHAPE OF THE INNER-BOUND

d_1, known to be achievable over the IC.

To summarize, we know the achievability of two key points:

$$P_1 \equiv (d_1, d_2) = (\min(N_1, M_1 + M_2), 0)$$
$$P_2 \equiv (d_1, d_2) = \left(\min\left\{N_1, N_2 - \left((N_2 - M_2)^+ - M_1\right)^+\right\} - \min(N_1, N_2, M_2), \min(N_2, M_2)\right).$$

Let us define d_1^* and d_2^* such that the line $\frac{d_1}{d_1^*} + \frac{d_2}{d_2^*} = 1$ passes through points P_1 and P_2.

Then we have the following proposition.

Proposition 2: The following region is an inner-bound on the dof region of the CRC with no CSIT:

$$\mathbf{D}_{\text{inner}} = \left\{(d_1, d_2) \middle| d_1, d_2 \geq 0, d_2 \leq \min(M_2, N_2), \frac{d_1}{d_1^*} + \frac{d_2}{d_2^*} \leq 1\right\}. \tag{35}$$

We refer, in the sequel, to the bound on the weighted sum of d_1 and d_2 that appears above as the 'inner-bound on the weighted sum'.

In Fig. 5, we plot the typical shape of $\mathbf{D}_{\text{inner}}$. Note that point P_2 can be on d_2-axis.

VII. THE OUTER-BOUND AND THE DOF REGION OF THE CRC

We divide the analysis into three cases:

Case A: $N_2 \leq M_2$,

Case B: $N_2 > M_2$ and $M_1 \geq N_1$,

Case C: $N_2 > M_2$ and $N_1 > M_1$.

We now do a case-by-case analysis and find the outer-bound. Again, $d_2 \leq \min(M_2, N_2)$ is certainly an outer-bound. Thus, as in the case of the IC, we need to derive a bound on the weighted sum of d_1 and d_2 that any point $(d_1, d_2) \in \mathbf{D}$ must satisfy; we refer to this bound as the 'outer-bound on the weighted sum'. Again, as it was noted for the IC, we do not want a bound on any arbitrary weighted sum but on the appropriately chosen one.

Remark 8: The dof region of the CRC with perfect CSIT is given by [8]

$$\begin{aligned}\mathbf{D}^{csit} = \{(d_1, d_2)\,|d_1, d_2 \geq 0, d_1 \leq \min(M_1 + M_2, N_1), d_2 \leq \min(M_2, N_2),\\ d_1 + d_2 \leq \min\{M_1 + M_2, N_1 + N_2, \max(M_2, N_1)\}\}. \qquad (36)\end{aligned}$$

Remark 9: We first summarize the results we have. Let $\mathbf{D}_{\text{outer}}$ denote the outer-bound on $\mathbf{D}$.

Case A: $N_2 \leq M_2$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. If $N_1 > M_1$, then there is improvement over the IC [8].

Case B: $N_2 > M_2$ and $M_1 \geq N_1$:

- $N_1 \leq N_2$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. Additionally, if $N_2 \geq N_1 \geq M_2$, then $\mathbf{D} = \mathbf{D}^{csit}$. Also, there is no improvement over the IC.
- $N_1 > N_2$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. The outer-bound is presented in Theorem 10. Also the inner and outer bounds for the CRC match with the corresponding bounds for the IC.

Case C: $N_1 > M_1$ and $N_2 > M_2$: improvement over IC.

- $N_2 < \min(N_1, M_1 + M_2)$: $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. The outer-bound is presented in Theorem 11.

---

[8] By this we mean that the dof region of the CRC is strictly larger than that of the cooresponding IC.

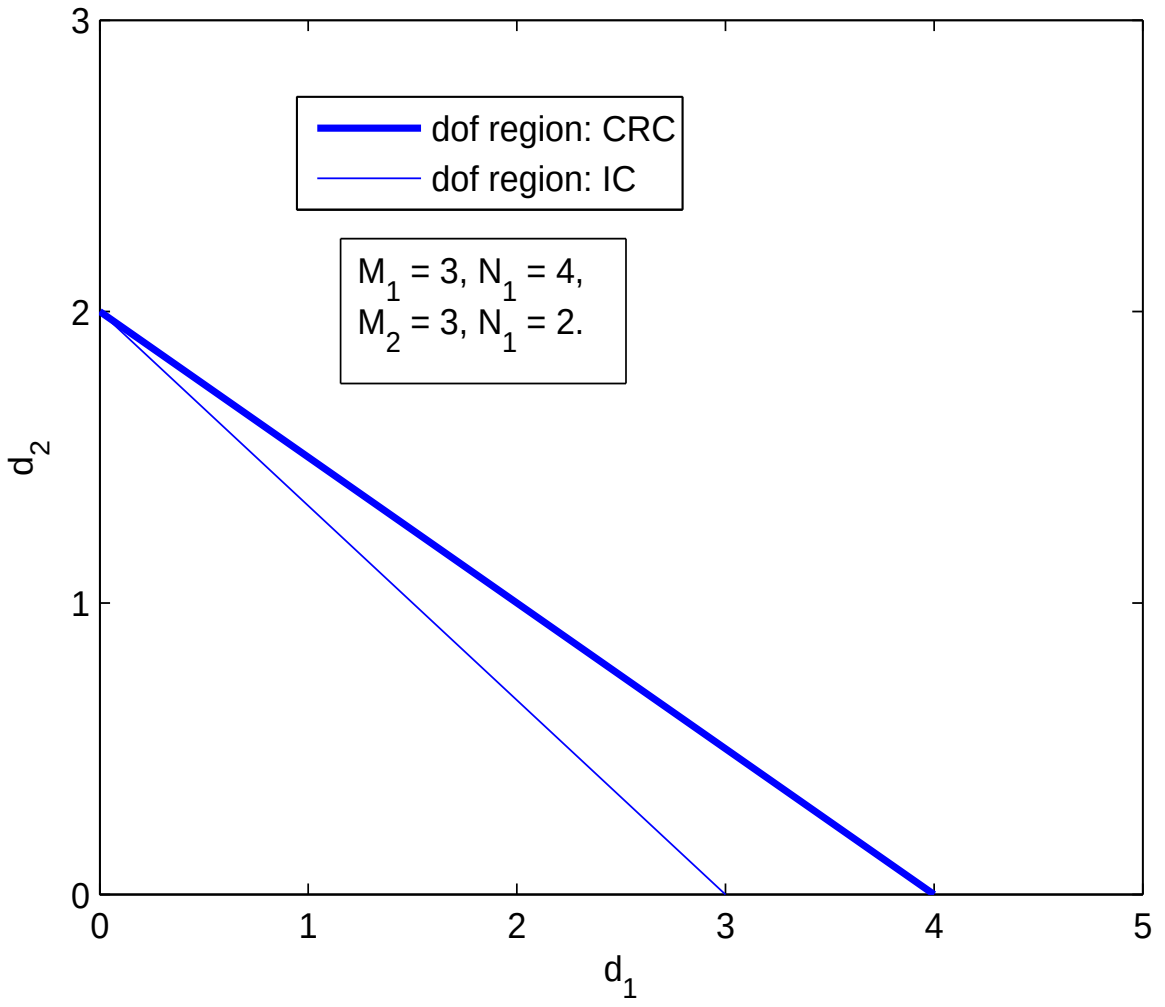

Fig. 6
CRC: Case A: Comparison of the dof regions of the CRC and the IC

- $N_2 \geq \min(N_1, M_1+M_2)$: $\mathbf{D} = \mathbf{D}_{\text{inner}}$. Additionally, if $N_1 \geq M_2$, then $\mathbf{D} = \mathbf{D}^{csit}$.

A. $N_2 \leq M_2$

Recall that the overall BC outer-bound is the dof region of the BC obtained by assuming perfect cooperation between the two transmitters. We thus get the outer-bound on the weighted sum as

$$\frac{d_1}{\min(N_1, M_1+M_2)} + \frac{d_2}{N_2} \leq 1.$$

This equation completely defines the outer-bound. However, this region is achievable over the CRC with no CSIT by time division. Thus we have the following theorem.

Theorem 8: For the MIMO CRC with $N_2 \leq M_2$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 2.

A comparison of the dof regions of the CRC and the IC for $M_1 = 3$, $N_1 = 4$, $M_2 = 3$, and $N_2 = 2$ is presented in Fig. 6.

B. $N_2 > M_2$ and $M_1 \geq N_1$

We had the same case for the IC as well (Case C). We divide the analysis into two subcases, just like we did for the IC (note these are different from those that appear in Remark 9).

B.1 $M_2 > N_1 \Rightarrow N_2 > M_2 > N_1$ and $M_1 \geq N_1$

We will first derive the outer-bound on the weighted sum. We apply Fano's inequality with the assumption that the message M_Y of the primary pair is known to the CR as well. We thus get

$$\begin{aligned} R_1 &\leq \lim_n \frac{1}{n} h(\mathbf{Y}|\mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Y}|M_Y, \mathbf{H}), \\ R_2 &\leq \lim_n \frac{1}{n} h(\mathbf{Z}|M_Y, \mathbf{H}) - \lim_n \frac{1}{n} h(\mathbf{Z}|M_Y, M_Z, \mathbf{H}). \end{aligned}$$

Now, we can prove

Lemma 5: The following inequality holds:

$$M_2 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Y}|M_Y, \mathbf{H})\right\} \geq N_1 \cdot \mathrm{MG}\left\{\lim_n \frac{1}{n} h(\mathbf{Z}|M_Y, \mathbf{H})\right\}. \tag{37}$$

Proof: Since $\mathbf{X^1}$ is determined by M_Y, conditioned on M_Y, the CRC is equivalent to the BC with CT as the transmitter and PR and CR as two receivers. Therefore, following the arguments of Lemma 3, the proof can be completed. ■

Using the above lemma, we get the outer-bound on the weighted sum as $\frac{d_1}{N_1} + \frac{d_2}{M_2} \leq 1$, which equals the inner-bound on the weighted sum. Hence, we have established the dof region in this case.

Also, for this configuration, the dof region of the CRC is equal to that of the IC.

B.2 $N_1 \geq M_2$

We further divide the analysis in two parts:

B.2.a $N_1 \leq N_2 \Rightarrow N_2 \geq N_1 \geq M_2$, $N_2 > M_2$, and $N_1 \leq M_1$

The analysis of this case follows along the similar lines as the proof of the previous case. We get the outer-bound on the weighted sum as $d_1 + d_2 \leq N_1$, which is equal to the inner-bound on the weighted sum.

If we explicitly evaluate the $\mathbf{D}^{csit}$, it is not difficult to see that $\mathbf{D}^{csit} = \mathbf{D}_{\text{inner}}$. The reason for such behavior is availability of enough receive antennas at the PR. This was also noted in the case of IC (Case B.2.a of IC).

Also, like the IC, two previous subcases can be combined to obtain the following theorem.

Theorem 9: For the MIMO CRC with $N_2 > M_2$, $M_1 \geq N_1$, and $N_1 \leq N_2$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 2.

B.2.b $N_1 > N_2 \Rightarrow M_1 \geq N_1 > N_2 > M_2$

The overall BC outer-bound gives the outer-bound on the weighted sum as $\frac{d_1}{N_1} + \frac{d_2}{N_2} \leq 1$.

We thus have the following outer-bound:

Theorem 10: Consider the MIMO CRC with $M_1 \geq N_1 > N_2 > M_2$. The following region provides an outer-bound on the dof region

$$\mathbf{D}_{\text{outer}} = \left\{ (d_1, d_2) \middle| d_1, d_2 \geq 0, d_2 \leq M_2, \frac{d_1}{N_1} + \frac{d_2}{N_2} \leq 1 \right\}, \tag{38}$$

i.e., $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$.

For such an antenna configuration, the outer and inner bounds on the dof regions of the IC and the CRC match. Hence, just like the case of the IC, for the CRC with such an antenna configuration, we do not know the achievability of the entire outer-bound presented above.

C. $N_2 > M_2$ and $N_1 > M_1$

We have this case for the IC but the further subdivisions are different from that of the IC.

C.1 $N_2 \leq \min(N_1, M_1 + M_2)$

Again by the overall BC outer-bound we get the outer-bound on the weighted sum as $\frac{d_1}{\min(N_1, M_1+M_2)} + \frac{d_2}{N_2} \leq 1$. This corresponds to the line joining points $P_1' \equiv (\min(N_1, M_1 + M_2), 0)$ and $P_2' \equiv \left((N_2 - M_2)\frac{\min(N_1, M_1+M_2)}{N_2}, M_2\right)$.

The inner-bound on the weighted sum corresponds to the line joining the points $P_1 \equiv (\min(N_1, M_1 + M_2), 0)$ and $P_2 \equiv (N_2 - M_2, M_2)$. Since in this case, $\min(N_1, M_1 + M_2) \geq N_2$, the point P_2' is outside the inner-bound unless $N_2 = \min(N_1, M_1 + M_2)$.

This yields the following theorem.

Theorem 11: Consider the MIMO CRC with $N_1 > M_1, N_2 > M_2$ and $N_2 \leq \min(N_1, M_1 + M_2)$. The following region provides an outer-bound on the dof region

$$\mathbf{D}_{\text{outer}} = \left\{ (d_1, d_2) \middle| d_1, d_2 \geq 0, d_2 \leq M_2, \frac{d_1}{\min(N_1, M_1 + M_2)} + \frac{d_2}{N_2} \leq 1 \right\}, \tag{39}$$

i.e., $\mathbf{D} \subseteq \mathbf{D}_{\text{outer}}$. Furthermore, $\mathbf{D} = \mathbf{D}_{\text{outer}}$ if $N_2 = \min(N_1, M_1 + M_2)$.

In Fig. 7, we consider the CRC with $M_1 = 3$, $N_1 = 5$, $M_2 = 2$, and $N_2 = 4$ and the corresponding IC. We present the dof region of the IC and the inner and outer-bounds for the CRC. The inner-bound on the dof region of the CRC is strictly larger than the dof region of the IC.

C.2 $N_2 > \min(N_1, M_1 + M_2)$

We further consider two subcases.

C.2.a $N_1 \geq M_2$

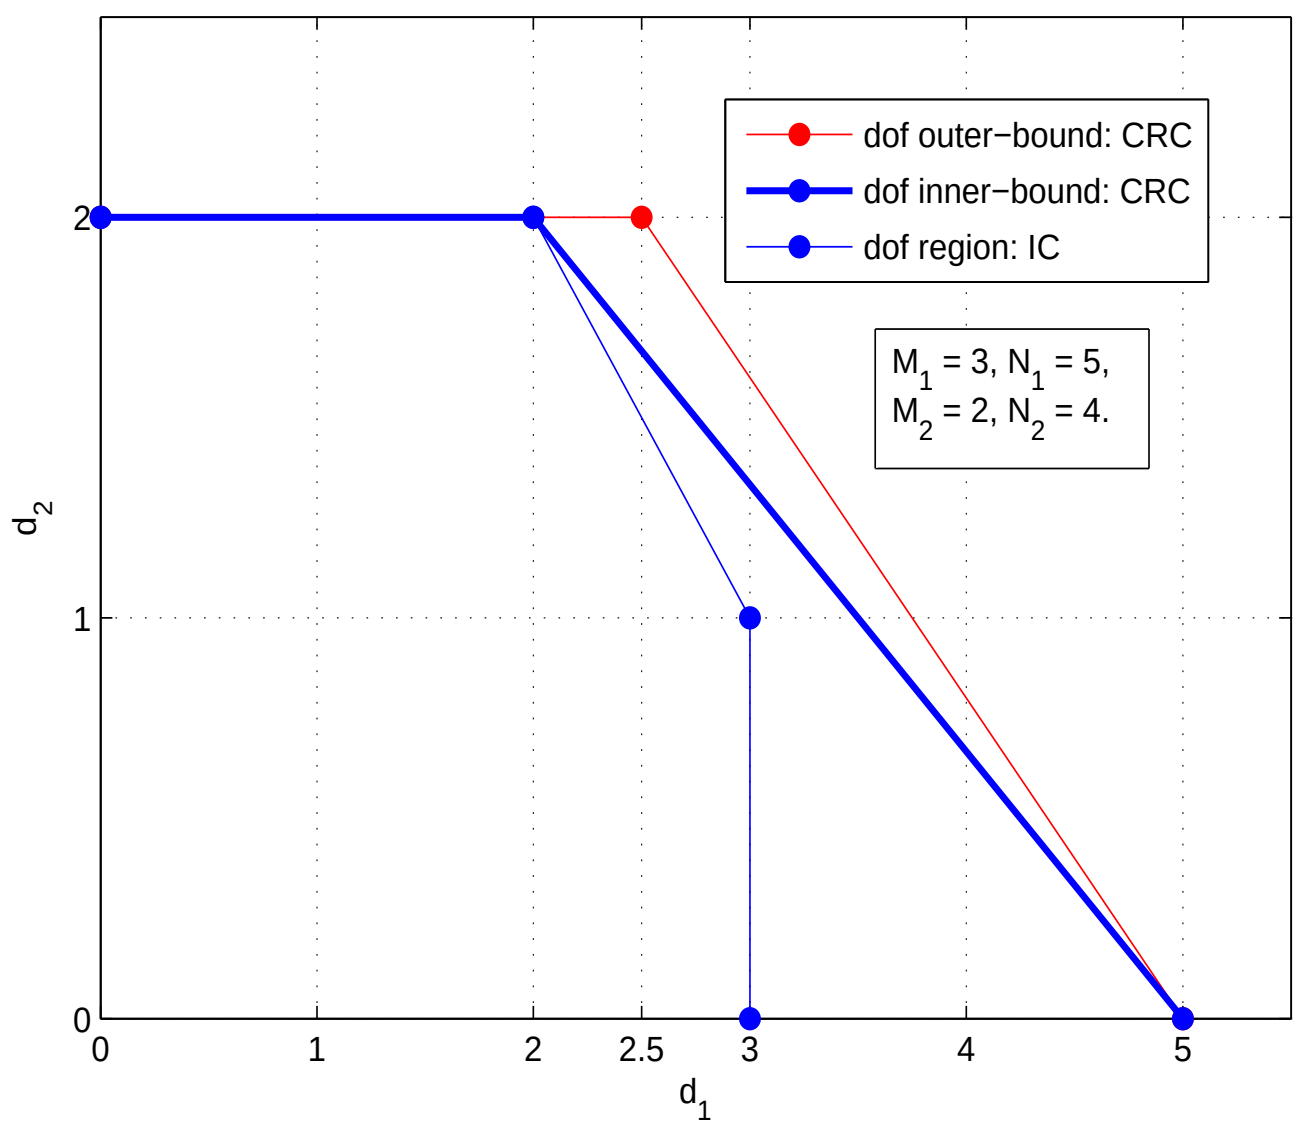

Fig. 7

CRC: Case C.1: The dof region of the IC and the inner and outer-bounds for the CRC

In this case, $\mathbf{D}^{csit}$ is defined by the constraints $d_2 \leq M_2$ and $d_1 + d_2 \leq \min(N_1, M_1 + M_2)$ [8]. Certainly, this region is an outer-bound on dof region. But, it can be verified that $\mathbf{D}_{\text{inner}} = \mathbf{D}^{csit}$.

C.2.b $M_2 > N_1 \Rightarrow N_2 > M_2 > N_1 > M_1$

We derive the outer-bound on the weighted sum through Fano's inequality. Assume again that the CR knows the message M_Y. Then it can be established that $\frac{d_1}{N_1} + \frac{d_2}{M_2} \leq 1$ is an outer-bound on the weighted sum. But it also coincides with the inner-bound on the weighted sum. Hence we get the dof region.

Theorem 12: For the MIMO CRC with $N_1 > M_1$, $M_2 \geq N_2$, and $N_2 > \min(N_1, M_1 + M_2)$, the dof region is equal to the inner-bound $\mathbf{D}_{\text{inner}}$ given in Proposition 2.

In Fig. 8, we consider the CRC with $M_1 = 2$, $N_1 = 3$, $M_2 = 4$, and $N_2 = 5$ and the corresponding IC. We present the inner and outer bounds on dof region of the IC and the dof region for the CRC. The inner-bound on the dof region of the IC is strictly smaller than

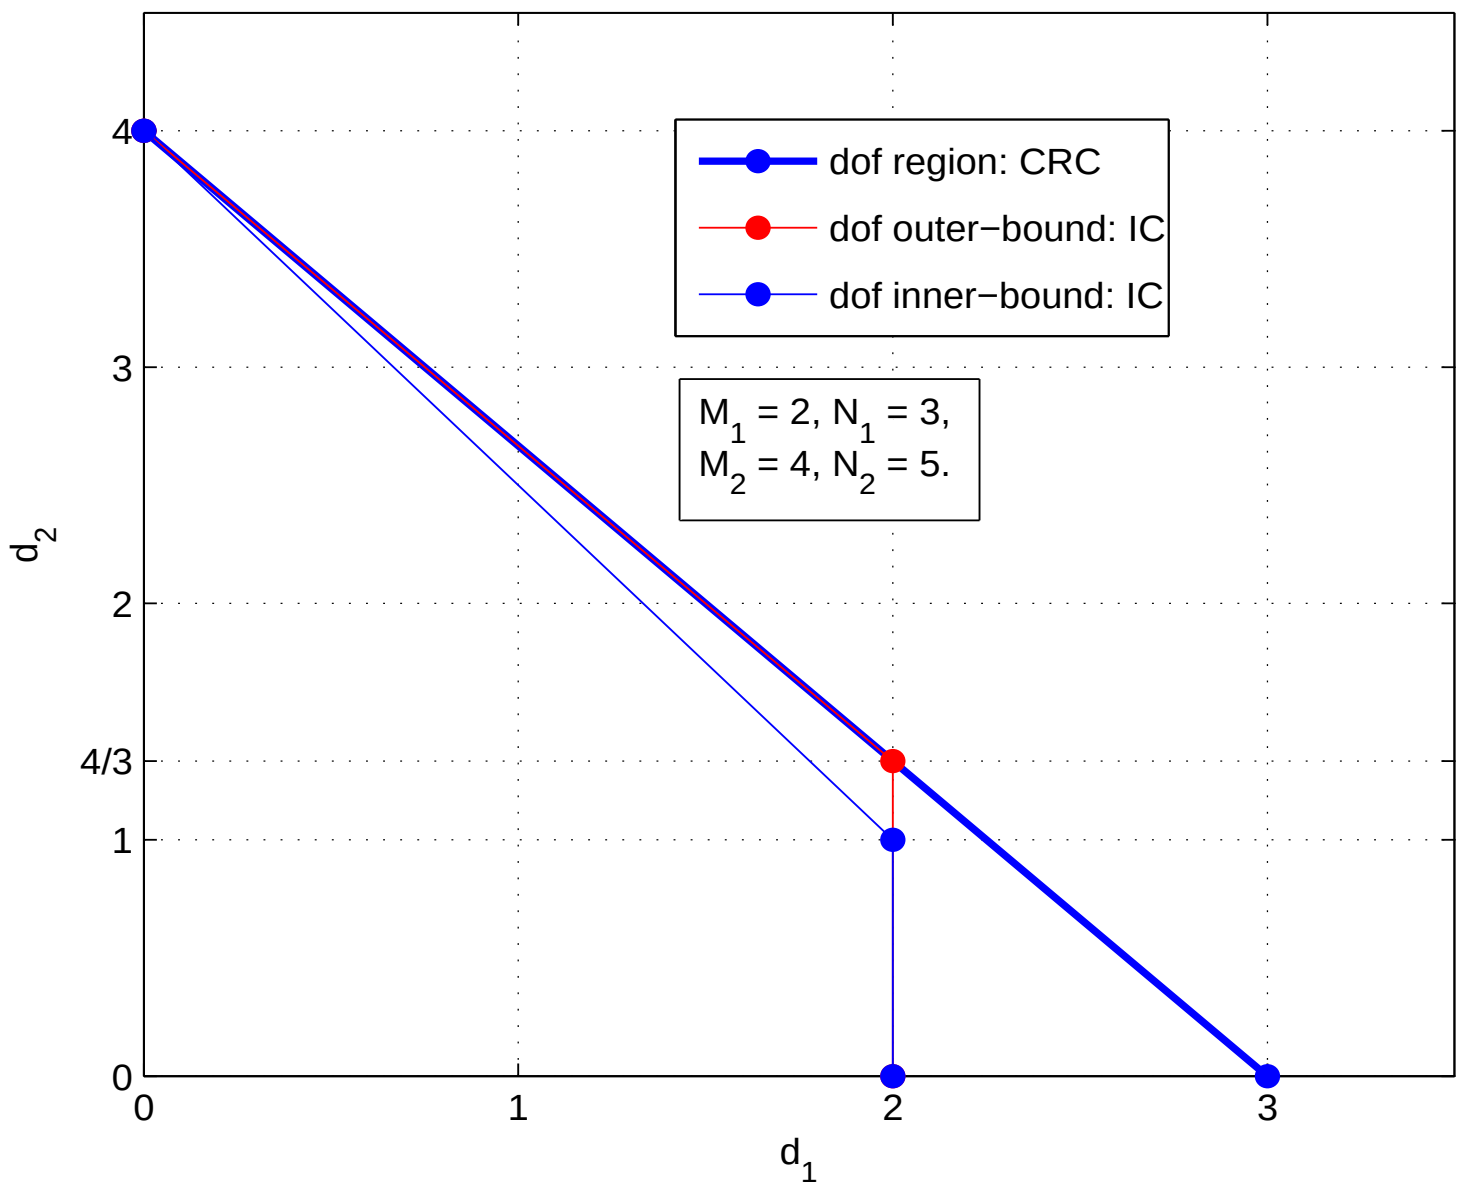

Fig. 8
CRC: Case C.2.b: The inner and outer bounds on the dof region of the IC and the dof region for the CRC

the dof region of the CRC. Interestingly, note the relation between the outer-bound for the IC and the dof region of the CRC.

This completes the analysis for all the cases.

Remark 10: Let us list the cases in which we have only the outer-bound:

1. $M_1 \geq N_1 > N_2 > M_2$,
2. $N_1 > M_1$, $N_2 > M_2$, and $N_2 < \min(N_1, M_1 + M_2)$.

VIII. Extensions to the K-User MIMO IC and the K-User CRC

In this section, we consider the K-user MIMO IC and the CRC and obtain the dof regions of these channels in some special cases. These results on the dof regions of the K-user IC and CRC are the applications of the corresponding result for the K-user BC.

The K-user IC can be defined as a generalization of the corresponding two-user IC, quite similar to the way we generalized the two-user BC to define the K-user BC. The input-output relationship for the K-user IC is given by

$$Y^i(t) = \sum_{j=1}^{K} H^{ij}(t) X^j(t) + W^i(t), \tag{40}$$

where, at time t, $Y^i(t) \in \mathcal{C}^{N_i}$ is the received signal at the i^{th} receiver; $X^j(t) \in \mathcal{C}^{M_j}$ is the signal transmitted by transmitter j under the power-constraint of P; $H^{ij}(t) \in \mathcal{C}^{N_i \times M_j}$ is the channel matrix from transmitter j to receiver i; $W^i(t)$ is additive noise; and there is perfect CSIR but no CSIT.

The distributions of the additive noises and the fading channel matrices can be defined as natural extensions of the corresponding definitions in the two-user case. Define achievability of the rate-tuple, capacity region, the dof region in a standard manner.

We then have the following theorem.

Theorem 13: Consider the K-user IC $N_i \leq M_i$, $\forall\ i$. The dof region under no CSIT is given by

$$\left\{ (d_1, \cdots, d_K) \,\middle|\, d_i \geq 0\ \forall\ i, \sum_{i=1}^{K} \frac{d_i}{N_i} \leq 1 \right\}.$$

Proof: The above region is achievable by time division between the users. We thus need to prove the converse. Consider the BC formed by assuming perfect transmitter cooperation (the overall BC outer-bound). For this resulting K-user BC, using the results of Theorem 2, we see that the region defined in the theorem is also an outer-bound. ■

The special case considered in the theorem is a generalization of Case A of the two-user IC.

Remark 11: Recently, it has been proved that over the time-varying K-user SISO IC with perfect channel knowledge at all nodes ($M_i = N_i = 1$, $\forall i$), the sum-dof equal to $\frac{K}{2}$ are achievable almost surely using the technique of interference alignment [17]. However, in the light of above theorem, we see that the sum-dof are limited by 1 when there is no CSIT.

Remark 12: The work in [17] was generalized in [20] to the case of the MIMO IC with perfect CSIT where all transmitters have M antennas and all receivers have N antennas each. In the case where all terminals have the same number of antennas, the sum-dof with perfect CSIT were proved to be $MK/2$. With no CSIT as per the above theorem, the dof collapse to M.

We define the K-user MIMO CRC as an IC wherein the first pair is primary while all other pairs are cognitive, i.e., transmitters 2 to K know the message of the primary/first transmitter non-causally. We then have the following result.

Theorem 14: Consider the K-user MIMO CRC with no CSIT in which $M_i \geq N_i$, $\forall i > 1$. The dof region is give by

$$\left\{ (d_1, \cdots, d_K) \middle| \, d_i \geq 0 \; \forall \; i, \; \frac{d_1}{\min(\sum_{i=1}^{K} M_i, N_1)} + \sum_{i=2}^{K} \frac{d_i}{N_i} \leq 1 \right\}.$$

Proof: Clearly, the above region is achievable by time division. By the overall BC outer-bound, we see that the region defined in the theorem, is also an outer-bound. ■

Note, the special case considered in the theorem is a generalization of Case A of the two-user CRC. Thus, in the above special cases, the dof regions of the K-user IC and the CRC are derived.

IX. CONCLUSION

In this paper, we dealt with the problem of obtaining the dof regions of the MIMO BC, the IC, and the CRC when there is no CSIT. In the case of K-user BC, the exact characterization is obtained. In the case of the IC and the CRC, except for certain antenna configurations, the dof region are obtained. The study of these remaining cases appears to be the next logical step. Furthermore, the dof regions of K-user IC and the K-user CRC are derived in some special cases. One possible extension of the CRC problem considered here is to allow for the possibility of any of the four terminals (in the IC) to be cognitive. The dof region for such a channel with perfect CSIT has been derived [8]. However, the case of imperfect CSIT will be a subject of further work. Also, the results derived here for no CSIT warrant a generalization to the case of partial CSIT.

REFERENCES

[1] I. E. Telatar, "Capacity of multi-antenna gaussian channels," *Euro. Trans. Telecomm.*, vol. 10, no. 6, pp. 585–595, Nov./Dec. 1999.

[2] G. Caire and S. Shamai (Shitz), "On the achievable throughput of a multiantenna gaussian broadcast channel," *IEEE. Trans. Inform. Theory*, vol. 49, no. 7, pp. 1691–1706, Jul. 2003.

[3] S. A. Jafar and A. J. Goldsmith, "Isotropic fading vector broadcast channels: The scalar upper bound and loss in degrees of freedom," *IEEE Trans. Inform. Theory*, vol. 51, no. 3, pp. 848–857, Mar. 2005.

[4] A. Lapidoth, S. Shamai (Shitz), and M. Wiger, "On the capacity of a MIMO fading broadcast channel with imperfect transmitter side-information," in *43rd annual Allerton Conference on Communication, Control and Computing*, Monticello, IL, Sep. 2005; Available: http://arxiv.org/abs/cs/0605079.

[5] C. Huang, S. A. Jafar, and S. Shamai (Shitz), "Multiuser mimo degrees of freedom with no CSIT," in *Inform. Theory and Applications Workshop*, UCSD, San Diego, Feb. 2009.

[6] A. Carleial, "Interference channels," *IEEE Trans. Inform. Theory*, vol. 24, no. 1, pp. 60–70, Jan. 1978.

[7] S. A. Jafar and M. J. Fakhereddin, "Degrees of freedom for the MIMO interference channel," *IEEE Trans. Inform. Theory*, vol. 53, no. 7, pp. 2637–2642, Jul. 2007.

[8] C. Huang and S. A. Jafar, "Degrees of freedom of the MIMO interference channel with cooperation and cognition," *IEEE Trans. Inform. Theory*, vol. 55, no. 9, pp. 4211–4220,

Sep. 2009.

[9] N. Devroye, P. Mitran, and V. Tarokh, "Achievable rates in cognitive radio channels," *IEEE Trans. Inform. Theory*, vol. 52, no. 5, pp. 1813–1827, May 2006.

[10] W. Wu, S. Vishwanath, and Ari Arapostathis, "Capacity of a class of cognitive radio channels: Interference channels with degraded message sets," *IEEE Trans. Inform. Theory*, vol. 53, no. 11, pp. 4391–4399, Nov. 2007.

[11] Sriram Sridharan and Sriram Vishwanath, "On the capacity of a class of MIMO cognitive radios," *IEEE Sel. Topics Sign. Process.*, vol. 2, no. 1, pp. 103–117, Feb. 2008.

[12] N. Jindal, "MIMO broadcast channels with finite rate feedback," *IEEE Trans. Inform. Theory*, vol. 52, no. 11, pp. 5045–5060, Nov. 2006.

[13] L. Weng, A. Anastasopoulos, and S. Pradhan, "Diversity gain region for MIMO fading broadcast channels," in *IEEE Inform. Theory Workshop*, Oct. 2004.

[14] C. Huang, S. A. Jafar, S. Shamai (Shitz), and S. Vishwanath, "On degrees of freedom region of MIMO networks without CSIT," Sep. 2009, Available Online: http://arxiv.org/pdf/0909.4017.

[15] Y. Zhu and D. Guo, "Isotropic MIMO interference channels without CSIT: The loss of degrees of freedom," in *Forty-Seventh Annual Allerton Conference*, UIUC, IL, USA, 2009.

[16] C. S. Vaze and M. K. Varanasi, "Dirty paper coding for the MIMO cognitive radio channel with imperfect CSIT," in *IEEE International Symposium on Information Theory*, Seoul, S. Korea, Jun.-Jul., 2009.

[17] V. R. Cadambe and S. A. Jafar, "Interference alignment and degrees of freedom of the K-user interference channel," *IEEE Trans. Inform. Theory*, vol. 54, no. 8, pp. 3425–3441, Aug. 2008.

[18] H. Weingarten, Y. Steinberg, and S. Shamai (Shitz), "The capacity region of multiple-input multiple-output broadcast channels," *IEEE Trans. Inform. Theory*, vol. 52, no. 9, pp. 3936–3964, Sep. 2006.

[19] T. Cover and J. Thomas, *Elements of Inform. Theory*, John Wiley and Sons, Inc., 1991.

[20] T. Guo and S.A. Jafar, "Degrees of Freedom for the K User M x N MIMO Interference Channel," *Submitted for publication http://arxiv.org/abs/0809.0099*, Aug. 2008.